



Standard Retrofit Hybrid Urinal

HYB-1000-RET

Product description

Standard, Vitreous China Retrofit Hybrid Urinal.

Compliances & Certifications



(ADA Compliant, BREEAM Water Credit, CalGreen Compliant, cUPC Certified, Green Globes Water, IAPMO, LEED Water, Satisfies LEED Credits)

Code 1001021

Downloads

- [HYB-1000-RET Installation Instructions.pdf](#)
- [Hybrid & Waterfree Urinal Series Repair and Maintenance Guide.pdf](#)
- [Cleaning and Cartridge Replacement Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Details

- Flush Volume: Waterfree (- lpf)
- Flush Volume determined by the Flushometer used with the Fixture
- Nominal Dimensions: 14.375" x 16.6" x 26.75" (365 x 422 x 679mm)
- Flush Method: Hybrid
- Jetrinse Solution: Yes

Features

- Jetrinse Solution Technology automatically cleans the housing and drain every 72 hours
- Virtually eliminates odor and drainline sediment formation that creates clogs
- Earns maximum LEED credits and minimal water and sewage costs
- Up to 5 times cleaner than conventional flushing urinals
- Maximizes cartridge life by eliminating premature changes
- Innovative gooseneck adapter allows fast and easy retrofitting of flushing urinals by using the existing control stop for Jetrinse supply
- IAPMO certified to applicable requirements, ASME A112.19.2, A112.19.19 & A112.1.3
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

Cartridge Specification

- Enhanced patented design maximizes life, prevents sealant loss and virtually eliminates odor
- Biodegradable sealant liquid
- Vandal resistant locking design
- 20% less plastic than previous designs
- Average of 7,000 uses per cartridge which can save each urinal up to 40,000 gallons of water annually
- Replacement cartridges sold separately

Jetrinse Solution Specifications

- Patented housing and drain line rinsing
- Automatic activation injects 1 gallon of water through housing and drain line every 72 hours to prevent struvite build-up and clogs
- IR switch for manual rinse activation
- 8-year, 6V lithium battery included
- Compliant to ASME A112.1.3 backflow requirements

Plumbing System Requirements

- Maximum Static Pressure: 80 PSI (552 kPa)
- 3/8" compression water supply required

Warranty


[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

DO NOT install on copper DWV due to copper's susceptibility to corrosion.

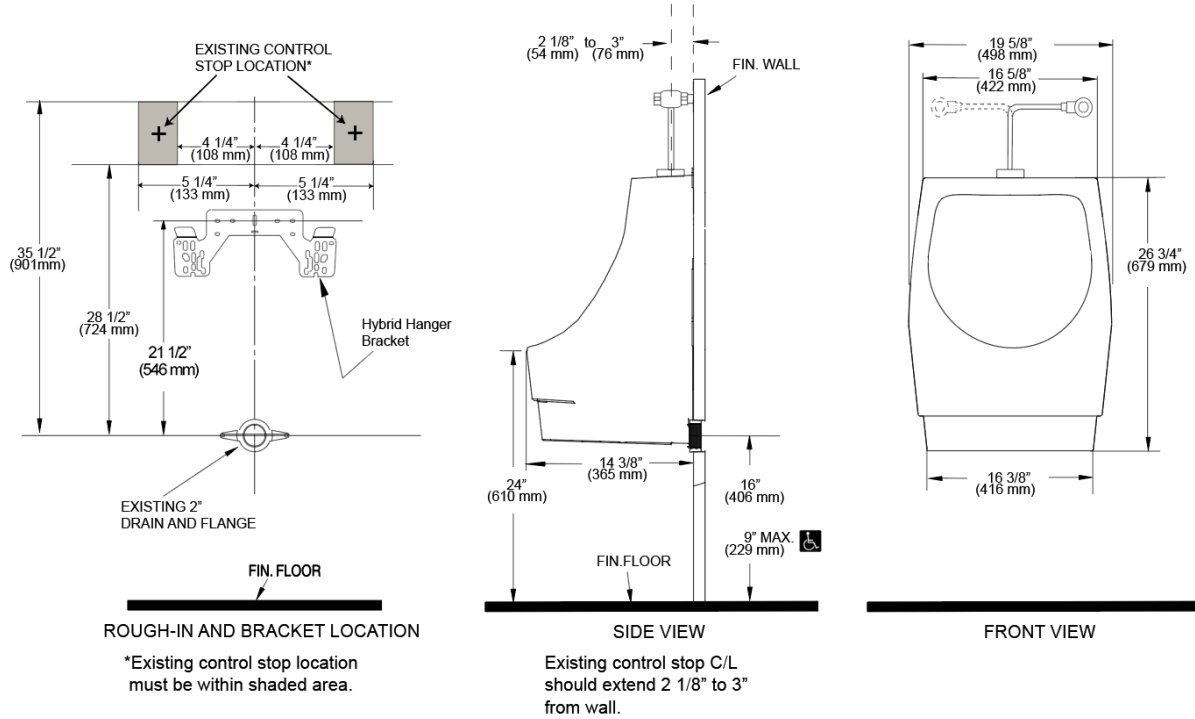

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.