


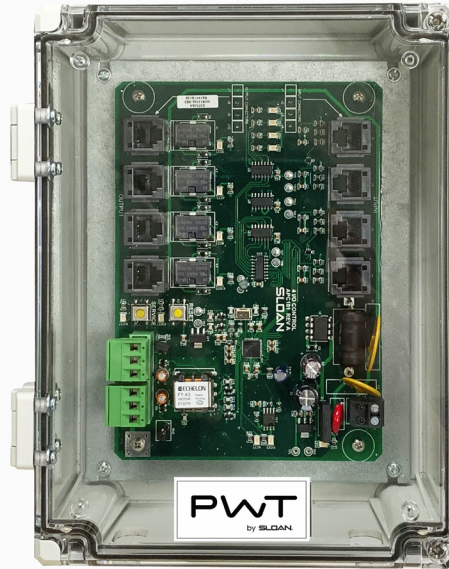

PWT™ Accessory

MCR-4001

Product description

PWT System 4-I/O Twisted Pair Communicating Controller.

Compliances & Certifications



(BAA Compliant)

Code 0375375

Downloads

- [Programmed Water Technologies \(PWT\) Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Features

- Four input/output controller used with PWT push buttons, electronic flushometers and solenoids to control water closets, lavatories and showers.
- Can connect to a computer managed, FT-10 (twisted pair) network. Operates on 24 VAC–50/60 Hz
- Can operate as “Stand Alone” controller or integrated into a computer managed network with PWT Water Management Software
- LonMark compliant
- RJ-11, 6 position, 4 pin connections for all input and output devices
- Plug-in type terminal blocks with screw clamp wire connections for network twisted pair wire connections
- Fuse protection on 24 VAC power supply
- Patented delay and lockout capabilities on water closet
- Delay before and/or after runtime available on lavatories and showers
- Input and output diagnostic LEDs

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

