

Optima® Sensor Faucet

EAF-200-PLG-ISM-SF-0.35GPM-MLM-IQ-FCT

Product description

Plug Adapter Power Supply, Integrated Side Mixer, Brushed Stainless Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Mid Body Faucet.

Compliances & Certifications

(ASME A112.18.1 Compliant, BREEAM Materials Credit, BREEAM Water Credit, CEC Compliant, EPD, Green Globes Credit, Green Globes Water, HPD, LEED Credit, LEED HPD, LEED Water, NSF-61/CAN-61, NYC604.4, Satisfies LEED Credits, TAS, WELL Building Standard)

Code 33351343

Finish

Brushed Stainless (SF)

Connectivity

Smart Capable with Adapter

Downloads

- EAF 200_225_250_275 Installation Instructions.pdf
- Optima Plus EAF 200 Repair and Maintenance Guide.pdf
- Faucet Spray Heads Maintenance Guide.pdf
- Faucet and Soap Dispenser Brochure.pdf
- Additional Downloads

Videos

- Sloan Connect App®

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Details

- Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Power Supply: Plug Adapter (PLG)
- Temperature Mixer: Integrated Side Mixer (ISM)
- Finish: Brushed Stainless (SF)
- Factory Default Timeout: 30s
- Factory Default GPC: 0.25 gpc

Features

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-Cast Metal Hand Washing Faucet with the following features:

- Double Infrared Sensors with Automatic Setting Feature and Microprocessor
- Automatic Self-adapting Sensor Technology
- Magnetic Solenoid Valve
- Water Supply Connection with Flexible High-pressure Hose and Strainer
- 6 Volt DC Plug-in Adapter (must be ordered separately for Less Adapter/Transformer (-LT) faucets)
- Appropriate Mounting Hardware included
- 3 year limited warranty
- Brushed Stainless Finish
- 0.35GPM flow pattern Rate with multi-laminar flow pattern
- Includes 120V plug-in transformer
- Integrated Side Mixer (ISM) included in spout for temperature setting and adjustment. Also includes cap to cover handle if removed.
-

Electrical specifications

- Sensor Range: 4”-5” (102-127 mm)
- Timeout Adjustment Setting: 30 Seconds

Warranty


View Warranty Information

Notes

All information contained within this document subject to change without notice.


Looking for other variations of the EAF-200 product? View the general spec sheet with all options.
Find a matching soap dispenser for this faucet.
Find a compatible sink for this faucet


EAF-200
Faucets with Single Line Water Supply

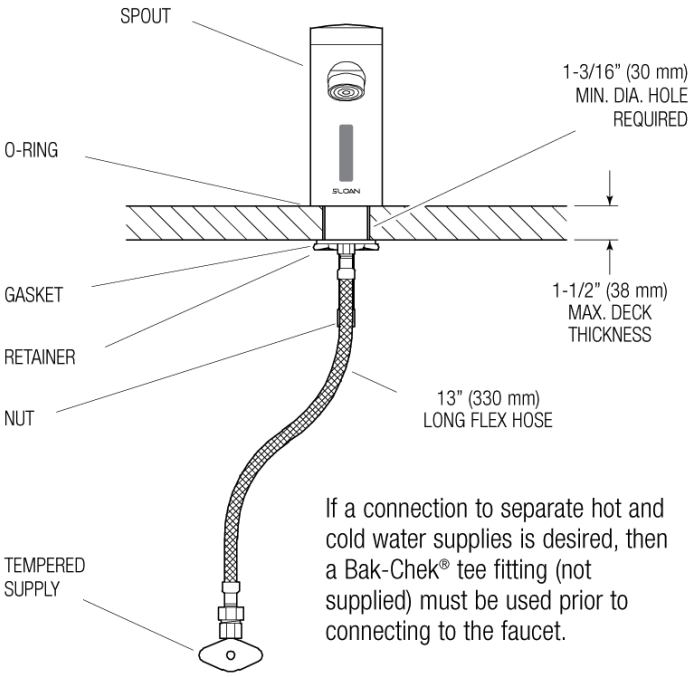

If a connection to separate hot and cold water supplies is desired, then a Bak-Chek® tee fitting (not supplied) must be used prior to connecting to the faucet.

EAF-200-ISM, EAF-200-ISM-IC AND
EAF-200-ISM-DPU-IC
Faucets with Hot and Cold Water Supply

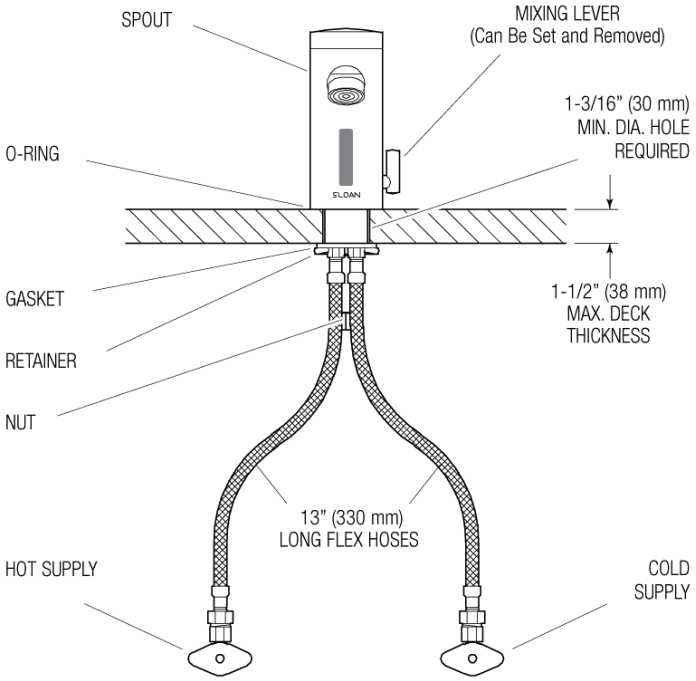

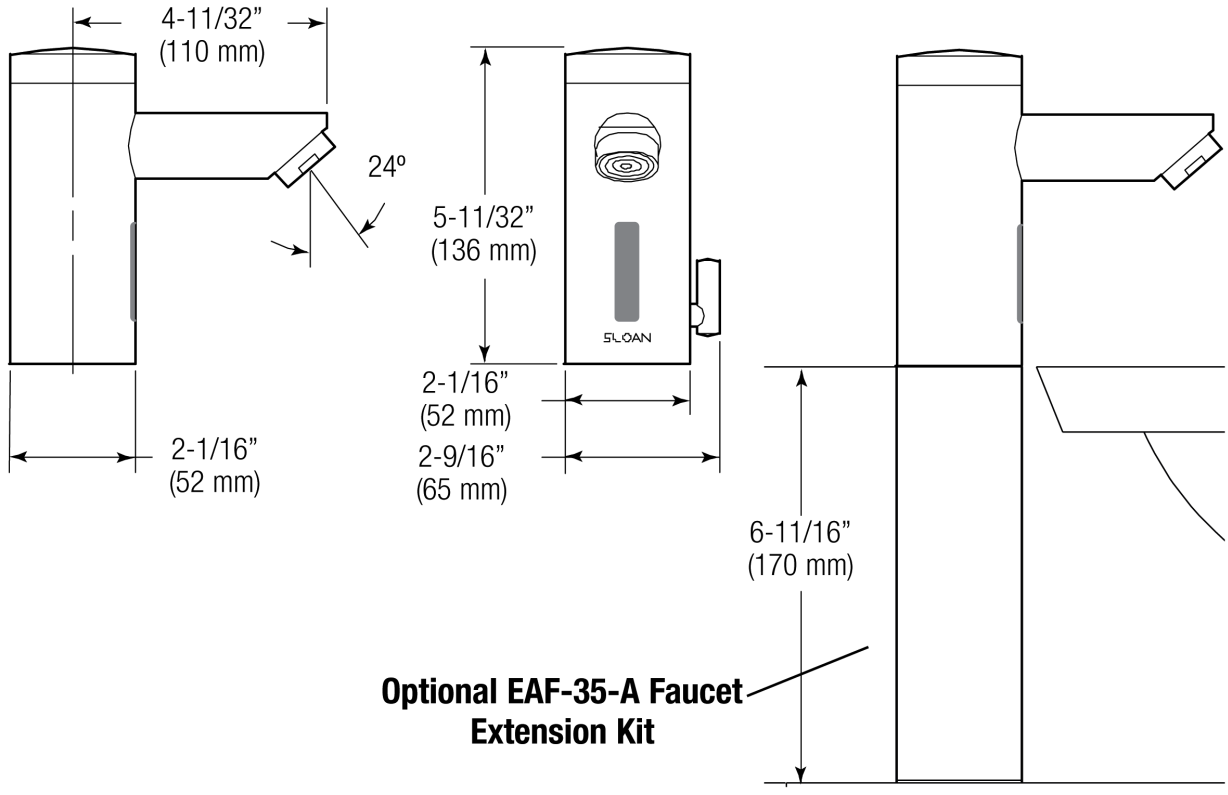

Optional EAF-35-A Faucet Extension Kit