

OPTIONS**Flush Volume**

3.5 gpf (13.2 Lpf) (3.5)

1.6 gpf (6.0 Lpf) (1.6)

Water Efficiency

Water Saver

Low Consumption

Control Stop

Ground Joint (GJ)

1" Straight (E)

Adjustable Ground Joint (ADJ/GJ)

Vacuum Breaker

Less (XYV)

Bumper

Angle Stop Extended (YG)

Special Features

Whitworth Thread (WWT)

Compliances & Certifications

ADA Compliant

BAA Compliant

BABAA Compliant

UPC Certified

NOTESFor product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

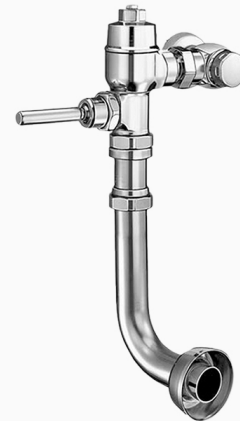


Image for a standard NAVAL 120 shown

DESCRIPTION

Naval Exposed Manual Water Closet Flushometer

FEATURES

- Non-hold-open oscillating handle, Bak-Chek™ control stop and self-cleaning Xpelor Metering By-Pass ensure reliable operation and accurate flush delivery
- Available with adjustable or ground joint supply stop (ground joint recommended for salt water applications)
- Factory set flush volume of either 1.6 gpf/6.0 Lpf or 3.5 gpf/13.2 Lpf with adjustment range of 1.5 gpf/5.7 Lpf to 7.0 gpf/26.5 Lpf
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Naval Piston Type Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Naval Repair and Maintenance Guide](#)
- [Additional Downloads](#)