



Urinal & Flushometer Combo

WEUS-1006.1421

Product description

Standard, SU-1009 Urinal and ROYAL 186 SFMS Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BREEAM Materials Credit, CalGreen Compliant, EPD, Green Globes Credit, HPD, IAPMO, LEED Credit, LEED HPD, Satisfies LEED Credits, cUPC Certified)

Code 10061421

Downloads

- [Royal Exposed Installation Instructions.pdf](#)
- [Standard Spud Urinal Installation Instructions.pdf](#)
- [EBV-500_550-A Installation Instructions.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 1.0 gpf (3.8 lpf)

Features

- Includes the required wall plate and a purple wall flange to let users know reclaimed water is in use
- All organic rubber has been replaced with synthetic compounds
- Optional purple handle provides additional indication of reclaimed water use
- Critical components, including cover, valve body, control stop and sweat solder kit, are made of semi-red brass
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- Designed to maximize and complement Sloan flushometers
- Universal high-efficiency model works with 0.125, 0.25 and 0.5 gpf Sloan flushometers
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

Components


- Flushometer: Code 3912745
- Urinal: Code 1101009

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.@AttributePlain:*Compliant with ADA accessibility requirements when installed according to ADA standards.

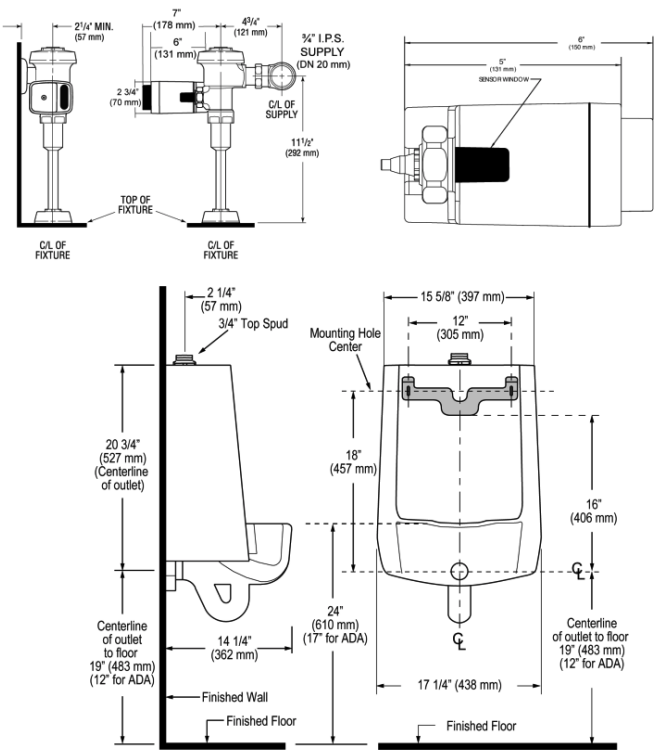

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.