

OPTIONS

Flush Volume

- 1.6 gpf (6.0 Lpf) (1.6)
- 1.28 gpf (4.8 Lpf) (1.28)
- 3.5 gpf (13.2 Lpf) (3.5)

Water Efficiency

- Low Consumption
- High Efficiency
- Water Saver

Bypass

- Dual-Filtered Fixed Bypass Diaphragm

L Dimension

- 2"-10 ¾" (51-273mm)
- 13"-14 ¾" (330-375mm)
- 11"-12 ¾" (279-324mm)

Override

- Electrical
- True Mechanical (TMO)

Wall Box

- With (W/BOX)
- Small (SWB)

Control Stop

- Less (L/STOP)

Special Features

- Less Logo (LL)

Compliances & Certifications

- BAA Compliant
- BABAA Compliant
- UL Certified
- UPC Certified
- ADA Compliant
- cUPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- CalGreen Compliant
- LEED V4 Water Efficiency Credit

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

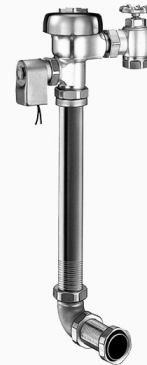


Image for a standard SLOAN 152 ESS shown

DESCRIPTION

Sloan® Concealed Sensor Hardwired Water Closet Flushometer

FEATURES

- Flush volumes start as low as 1.6 gpf/6.0 Lpf;
- Water conservation is aided by the ADA-compliant, non-hold-open handle;
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency;
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance;
- Adjustable tailpiece to accommodate different height requirements.
- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Sloan/Regal Concealed and Exposed Sensor Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Optima ESS Repair and Maintenance Guide](#)
- [Optima ESS TMO SWB Concealed Repair and Maintenance Guide](#)
- [Flushometer Pressure gauges](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

- [Additional Downloads](#)

VIDEOS



ESS Flushometer