



Variation not shown: Shower Head Spray

## Optima® Sensor Faucet

ETF-500-PLG-BDM-CP-1.5GPM-SHR-FCT

### Product description

Plug Adapter Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 1.5 gpm, Shower Head Spray, Infrared Sensor, Optima® Hardwired-Powered Wall-Mounted Gooseneck Body Faucet.

### Compliances & Certifications



(ADA Compliant\*, ASME A112.18.1 Compliant, CEC Compliant, EPD, HPD, IAPMO, NSF-61/CAN-61, TAS, UL Certified (US), UPC Low Lead Certified, EPA WaterSense Listed, WELL Building Standard)

### Code 3365374BT

#### Finish

 Polished Chrome (CP)

#### Connectivity

 Bluetooth with Sloan Connect App

#### Downloads

-  [Optima Smart Faucet Below Deck Installation Instructions.pdf](#)
-  [Trim Plate Guide.pdf](#)
-  [Faucet Spray Heads Maintenance Guide.pdf](#)
-  [EBF-550-EBF-550-S-ETF-500 ETF-500-S-BT.pdf](#)
-  [Additional Downloads](#)

#### Videos

-  [Sloan Connect App®](#)

## Details

- Flow Rate: 1.5 gpm (5.7 Lpm) (1.5GPM)
- Spray Type: Shower Head (SHR)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Mounting Size: Single Hole 1"
- Power Supply: Plug Adapter (PLG)
- Temperature Mixer: Below Deck Manual Mixing Valve (BDM)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30s
- Factory Default GPC: 0.75 gpc

## Features

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Hand Washing Faucet with the following features:

- Commercial Grade Faucet
- ADA Compliant
- Cast Brass Spout
- Quick Connect Fittings
- Integrated Water Shut-off
- Wireless Settings Adjustment
- On-demand or Metered activation
- Hygienic Line Flush
- Water Usage and Battery Strength Reporting
- Self-adapting Sensor
- Chrome plated finish

## Recommended specifications

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones.

## Electrical specifications

- Battery Life: 3 years 8,000 cycles/month
- Optional power harvesting significantly extends service life
- Sensor Range: 4" -5" (102-127 mm)
- Timeout Adjustment Setting: 30 Seconds

## Power Supply Options

- 6VDC Plug Adapter (included with PLG models)/0362006
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately)/0362035
- 24VAC Box Transformer (included with BOX models)/0345370PK

## Warranty

[View Warranty Information](#)

## Notes


All information contained within this document subject to change without notice.

\*Compliant with ADA accessibility requirements when installed according to ADA standards.


Looking for other variations of the ETF-500 product? [View the general spec sheet with all options.](#)

[Find a matching soap dispenser](#) for this faucet.


[Find a compatible sink](#) for this faucet

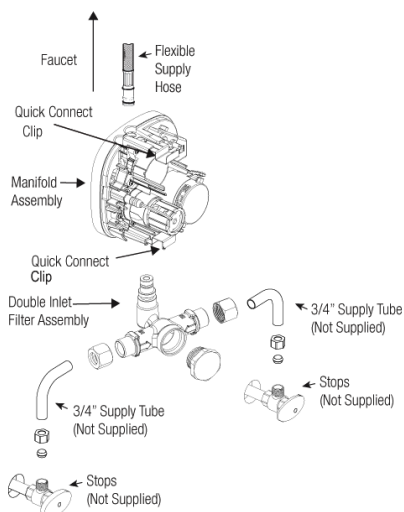

Double Inlet Filter Fitting

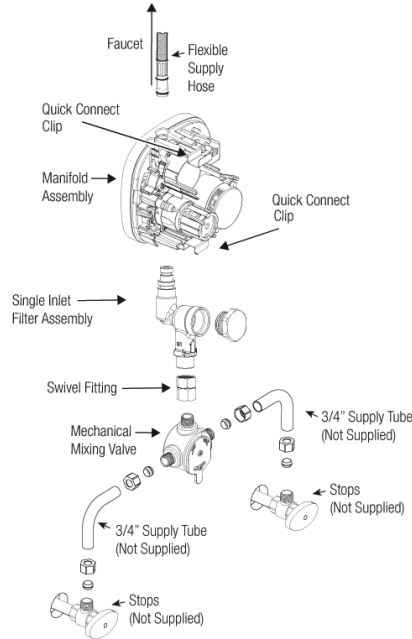

Single Inlet Filter Fitting Kit with Below Deck Manual Mixing Valve (BDM)

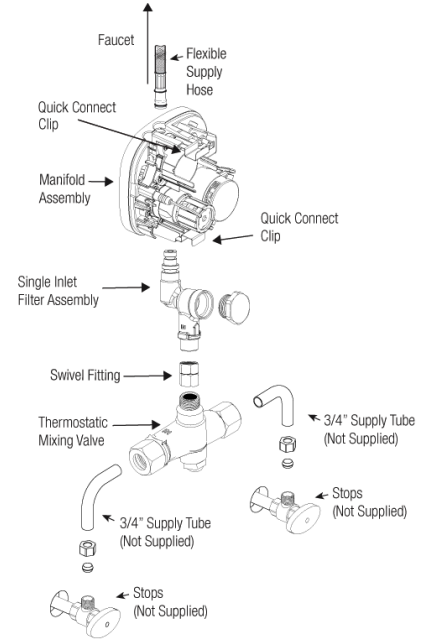

Single Inlet Filter Fitting Kit with Below Deck Thermostatic Mixing Valve (BDT)

