


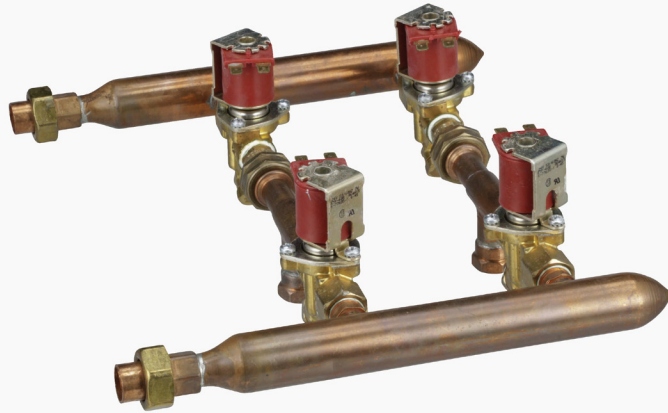

PWT™ Accessory

MCR-102-A

Product description

PWT System 2-Line Mixing Manifold.

Compliances & Certifications



(BAA Compliant)

Code 0375292

Downloads

- [Programmed Water Technologies \(PWT\) Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Features

PWT Two Line Mixing Manifold

- Manifold containing four electronically activated solenoids used to supply hot, cold and mixed water to two lavatory fixtures
- 1/2 Inch Pipe Copper Solder Unions at water inlets
- Soft Nose Union between solenoids
- Includes two fitting kits each containing the following:
 - Two 3/8 NPT to 3/8 Tube
 - One 0.5 gpm Flow Orifice
 - One 3/8 NPT to 3/8 NPT Coupling
- 20 feet 3/8 OD Nylon Tubing
- 24 VAC – 50/60 Hz Solenoid Operating Voltage, 12 VA (500mA)
In Rush; Holding 4.63 VA (193 mA), 7W Consumption
- 160 Fahrenheit Maximum water temperature
- Brass body with integral 'Y' strainer (80 Mesh)
- Stainless Steel Valve Seat
- Includes 15' cable w/ 6 position, 4 pin RJ-11 connector to connect to Sloan PWT MCR-Series Controller
- Solenoid cable length can be increased to a maximum overall length of 200 feet with additional PWT extension cord kits
- ETF-1003-36 3' single wire extension cord kit
- ETF-1003-108 9' single wire extension cord kit
- ETF-1003-240 20' Single wire extension cord kit
- ETF-1003-600 50' single wire extension cord kit

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

