



Optima® Sensor Faucet

EAF-200-HLT-CP-0.35GPM-MLM-IQ-CN-FCT

Product description

Carbon Neutral, Hardwired Less Transformer Power Supply, Mixer Not Included, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Mid Body Faucet.

Compliances & Certifications



(ADA Compliant*, ASME A112.18.1 Compliant, BREEAM Materials Credit, BREEAM Water Credit, CalGreen Compliant, Carbon Neutral*, CEC Compliant, EPD, Green Globes Credit, Green Globes Water, HPD, LEED Credit, LEED HPD, LEED Water, NSF-61/CAN-61, NYC604.4, Satisfies LEED Credits, TAS, WELL Building Standard)

Code 3335164T

Finish

 Polished Chrome (CP)

Connectivity

Smart Capable with Adapter

Downloads

-  EAF 200_225_250_275 Installation Instructions.pdf
-  Optima Plus EAF 200 Repair and Maintenance Guide.pdf
-  Faucet Spray Heads Maintenance Guide.pdf
-  Faucet and Soap Dispenser Brochure.pdf
-  Additional Downloads

Videos

-  Sloan Connect App®

Details

- Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Power Supply: Hardwired Less Transformer (HLT)
- Temperature Mixer: Mixer Not Included
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30s
- Factory Default GPC: 0.175 gpc

Features

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-Cast Metal Hand Washing Faucet with the following features:

- Double Infrared Sensors with Automatic Setting Feature and Microprocessor
- Automatic Self-adapting Sensor Technology
- Magnetic Solenoid Valve
- Water Supply Connection with Flexible High-pressure Hose and Strainer
- 6 Volt DC Plug-in Adapter (must be ordered separately for Less Adapter/Transformer (-LT) faucets)
- Appropriate Mounting Hardware included
- 3 year limited warranty
- Chrome plated finish
- 0.35GPM flow pattern Rate with multi-laminar flow pattern
- AC Powered faucet less transformer (-LT), includes daisy chain connector for connecting up to 6 faucets.

Electrical specifications

- Sensor Range: 4" -5" (102-127 mm)
- Timeout Adjustment Setting: 30 Seconds

Warranty

[View Warranty Information](#)

Notes


All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.



^To obtain the certificate for your carbon-neutral products, please reach out to Sloan's customer support: customer.service@sloan.com.

Looking for other variations of the EAF-200 product? [View the general spec sheet with all options.](#)
[Find a matching soap dispenser](#) for this faucet.
[Find a compatible sink](#) for this faucet

EAF-200
Faucets with Single Line Water Supply

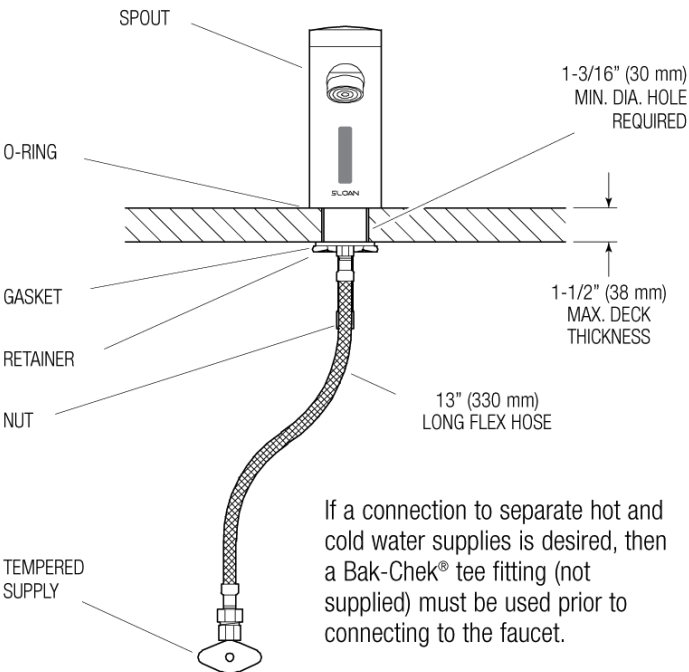

EAF-200-ISM, EAF-200-ISM-IC AND
EAF-200-ISM-DPU-IC
Faucets with Hot and Cold Water Supply

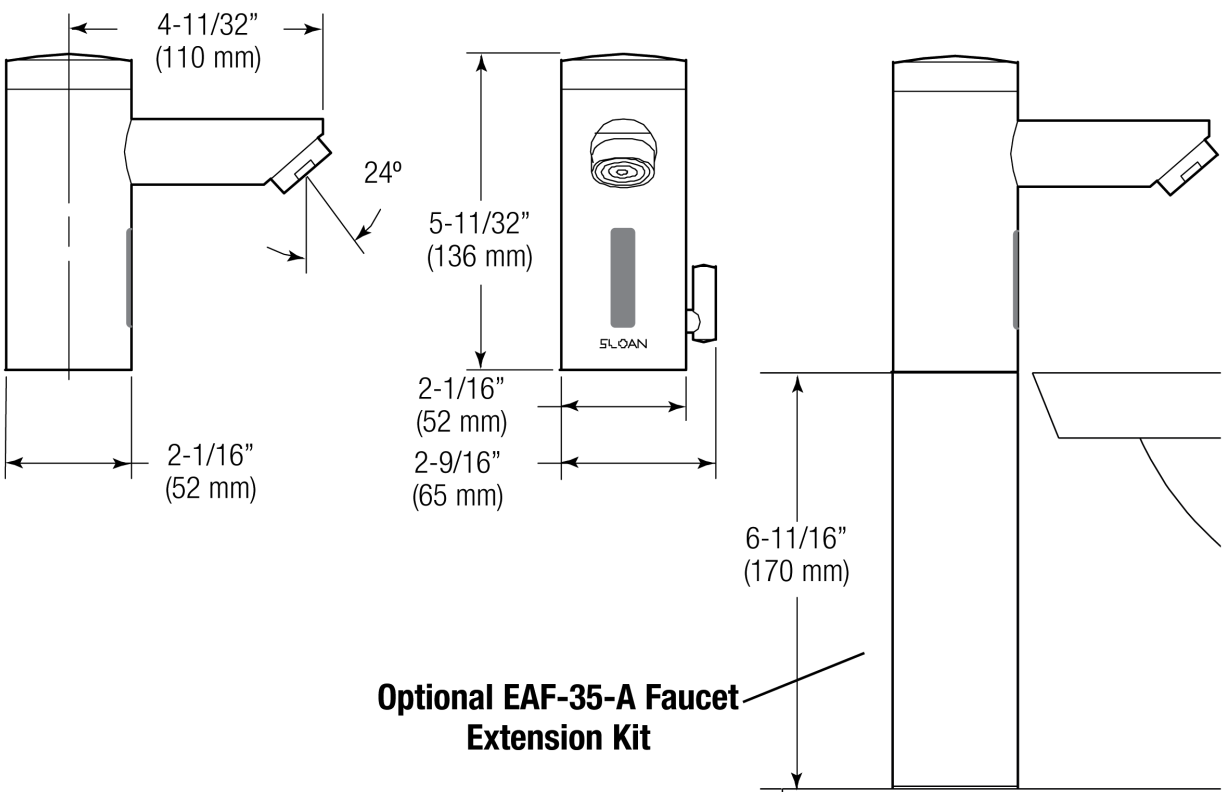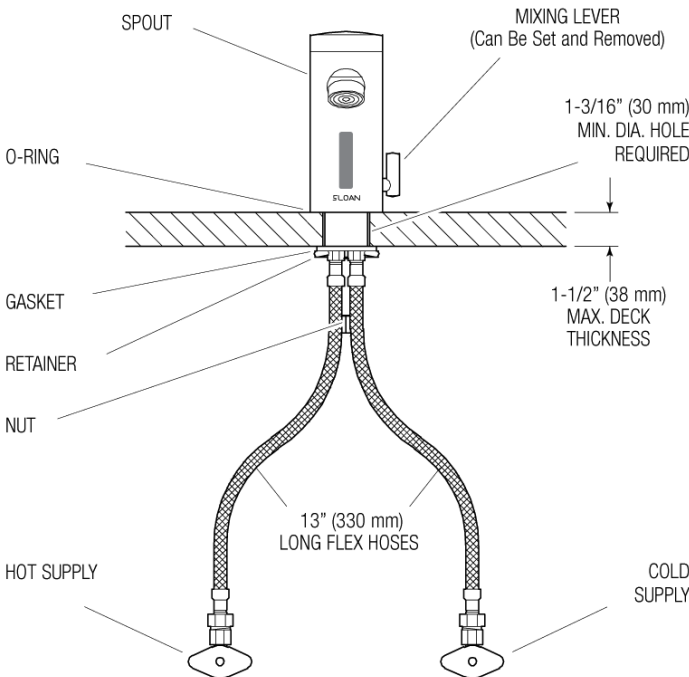

Optional EAF-35-A Faucet
Extension Kit