


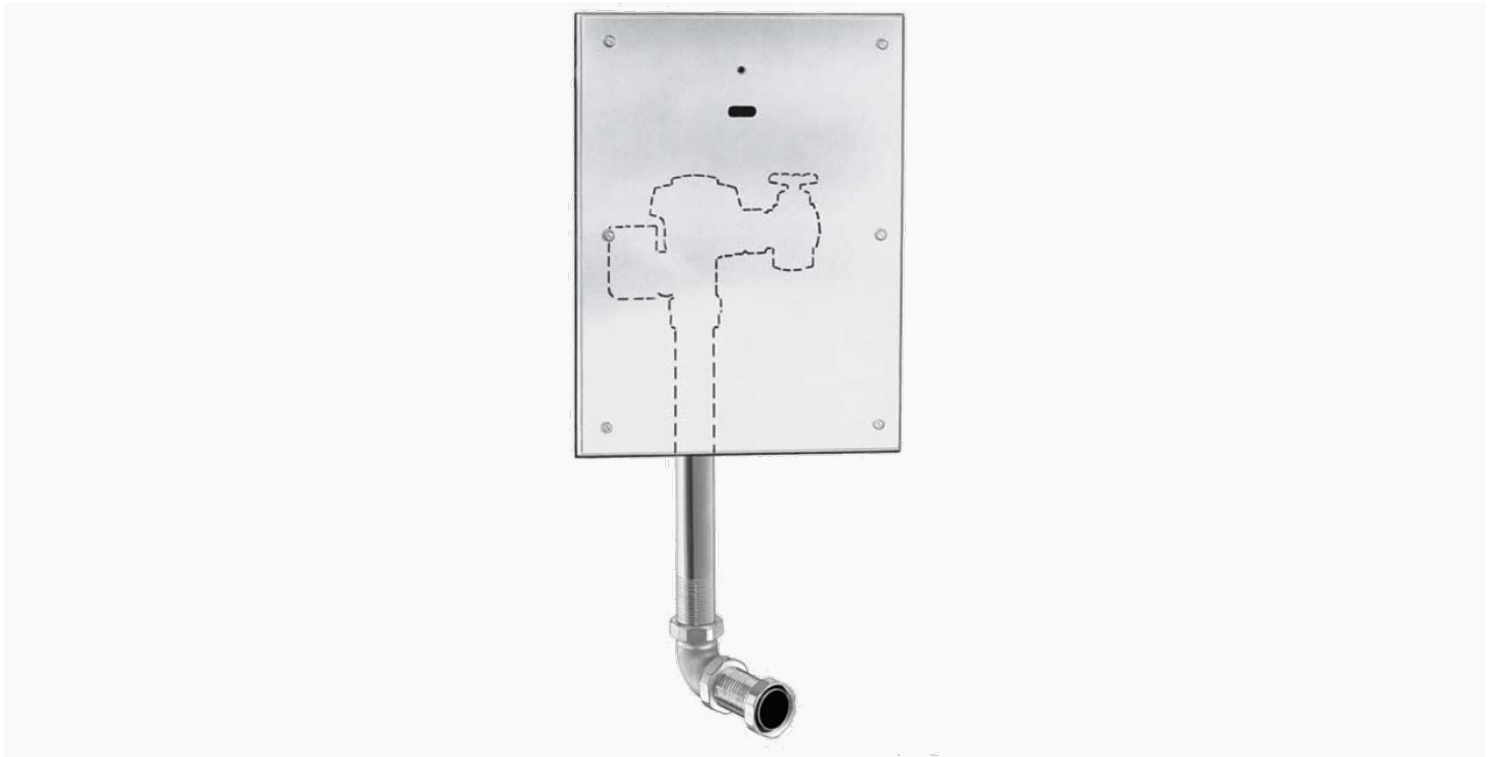

Royal® Sensor Flushometer

ROYAL 611 ESS WB-1.28-RB

Product description

1.28 gpf, Rough Brass Finish, Fixture Connection Rear Spud, Single Flush, Electrical Override, Hardwired, Sensor-Operated, Front Accessible Wall Box, Royal® Concealed Sensor Hardwired Water Closet Flushometer.

Compliances & Certifications



(BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, Green Globes Water, LEED Water, Satisfies LEED Credits)

Code 34581001

Finish



Rough Brass (RB)

Downloads

- [Royal ESS Concealed with Wall Box Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [ESS Flushometer](#)

Details

- Flush Volume: 1.28 gpf (4.8 lpf)
- Finish: Rough Brass (RB)
- Power Type: Hardwired (HW)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Rear Spud
- Rough-in Dimension: 14.5" (368mm)
- Spud Coupling: 1.5" (38mm)
- Supply Pipe: 1" (25mm)
- Override: Electrical
- Wall Box: Front Accessible

Features

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- OPTIMA® EL-1500-L Self-Adaptive Infrared Sensor with Indicator Light
- Courtesy Flush® Override Button
- Non-Hold-Open Integral Solenoid Operator
- 13" x 17" EASY ACCESS. Wall Box with Stainless Steel Access Panel and Vandal Resistant Screws
- 1" I.P.S. Wheel Handle Bak-Chek. Angle Stop
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker
- Elbow Flush Connection and Coupling for 1-1/2" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- Sweat Solder Adapter
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Integral Solenoid Operator, Fixed Metering Bypass
- External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID™ Technology
- Diaphragm, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber
- Compound for Chloramine Resistance
- Transformer not included—order separately

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Electrical specifications

- Arming Delay: 16 seconds
- Control Circuit:
 - 24 VAC Input
 - 24 VAC Output
 - Solid State
- Flush Delay: 3 seconds
- Sensor Range: 22"-42" (559 - 1067mm)
- Self-Adaptive Window: ±10"
- Solenoid Operator: 24 VAC
- Transformers (Specify Separately):
 - EL-154/0345154
 - EL-342/0345999

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 611 ESS WB product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

