



## Urinal & Flushometer Combo

WEUS-7009.1331

### Product description

Standard, SU-7009 Urinal and SLOAN 186 ESS Flushometer.

### Compliances & Certifications



(ADA Compliant, BREEAM Materials Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, Green Globes Credit, HPD, IAPMO, LEED Credit, LEED HPD, Satisfies LEED Credits, EPA WaterSense Listed)

### Code 70001331

#### Downloads

- [Sloan\\_Regal 110\\_111\\_115\\_116\\_140\\_153\\_152 ESS Installation Instructions.pdf](#)
- [Small Spud Urinal Installation Instructions.pdf](#)
- [Sloan:Regal ESS Repair and Maintenance Guide.pdf](#)
- [SS:ST:SU:WETS:WEUS Fixtures Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

#### Videos

- [Sloan - Company Overview](#)

---

## Details

- Flush Volume: 0.125 gpf (0.5 lpf)

---

## Features

- Flush volumes start as low as 1.0 gpf/3.8 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents urinal from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- Designed to maximize and complement Sloan flushometers
- Small size and clean lines fits a large variety of applications and restroom looks
- Thorough washdown flushing action
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

---

## Components

- Flushometer: Code 3772695
- Urinal: Code 1107009

---


## Warranty

[View Warranty Information](#)

---

## Notes

All information contained within this document subject to change without notice.

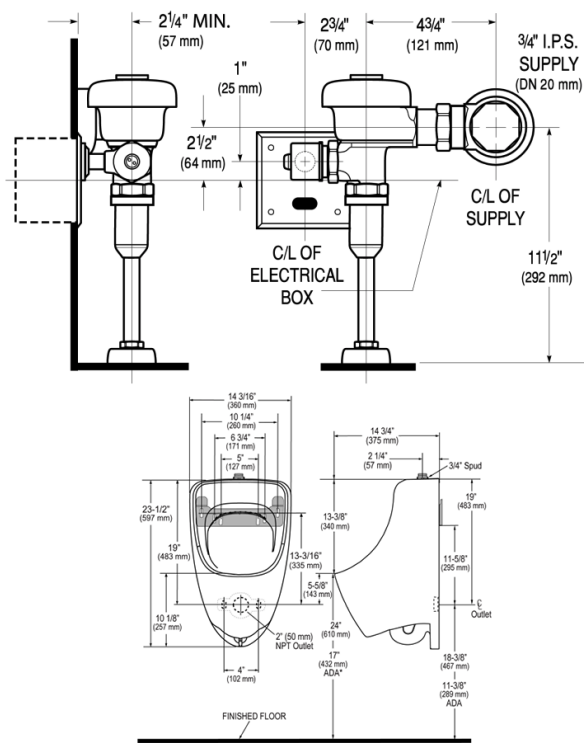

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.