


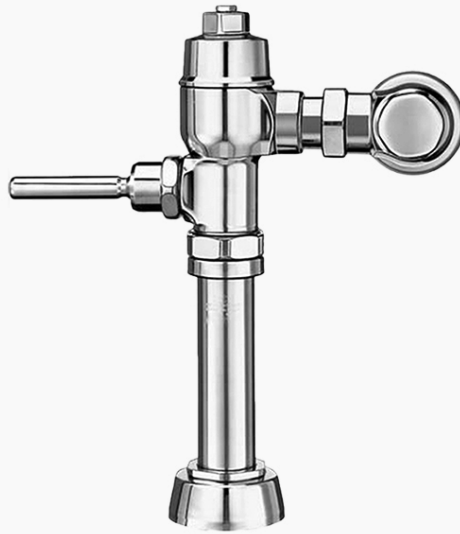

## Naval Manual Flushometer

NAVAL 110-3.5-GJ-CP-WWT-XYV

### Product description

3.5 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Ground Joint Control Stop, Whitworth Thread, Less Vacuum Breaker, Naval Exposed Manual Water Closet Flushometer.

### Compliances & Certifications



(ADA Compliant\*, BAA Compliant, IAPMO, UPC Certified)

### Code 3140132

#### Finish

 Polished Chrome (CP)

#### Downloads

- [Naval Piston Type Exposed Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

#### Videos

- [Sloan – Company Overview](#)

## Details

- Flush Volume: 3.5 gpf (13.2 lpf)
- Finish: Polished Chrome (CP)
- Valve: Piston
- Valve Body Material: Red Brass
- Fixture Type: Water Closet
- Fixture Connection: Top Spud
- Rough-in Dimension: 11.5" (292mm)
- Spud Coupling: 1.5" (38mm)
- Supply Pipe: 1" (25mm)
- Control Stop: Ground Joint (GJ)
- Vacuum Breaker: Less (XYV)
- Special Features 1: Whitworth Thread (WWT)

## Features

- Non-hold-open oscillating handle, Bak-Chek™ control stop and self-cleaning Xpelor Metering By-Pass ensure reliable operation and accurate flush delivery
- Available with adjustable or ground joint supply stop (ground joint recommended for salt water applications)
- Factory set flush volume of either 1.6 gpf/6.0 Lpf or 3.5 gpf/13.2 Lpf with adjustment range of 1.5 gpf/5.7 Lpf to 7.0 gpf/26.5 Lpf
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- Sweat solder kit not provided, order separately if required.

## Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

## Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

## Warranty

[View Warranty Information](#)

## Notes

All information contained within this document subject to change without notice.

\*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the NAVAL 110 product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

