



G2 Sensor Flushometer

G2 RESS-C-1.6-CP-HW

Product description

1.6 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Electrical Override, Hardwired, G2 Exposed Sensor Water Closet Retrofit Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BABAA Compliant, IAPMO, cUPC Certified)

Code 3325486

Finish

 Polished Chrome (CP)

Downloads

-  G2 and ECOS Single Flush Optima Plus Valve Installation Instructions duplicate.pdf
-  Control Stop Repair and Maintenance Guide.pdf
-  Flush Connections Flanges Repair and Maintenance Guide.pdf
-  Additional Downloads

Videos

-  Sloan – Company Overview

Details

- Flush Volume: 1.6 gpf (6.0 lpf)
- Finish: Polished Chrome (CP)
- Power Type: Hardwired (HW)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Top Spud
- Override: Electrical

Features

- Valve shall be in compliance to the applicable sections of ASSE 1037

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Electrical specifications

- Flush Delay: 3 seconds
- Solenoid Operator: 6 VAC
- Transformers (Specify Separately):
 - EL-386/0345095 (Up to 1 Flushometer)
 - EL-451/0345125 (Up to 6 Flushometers)

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes


All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.



Looking for other variations of the G2 RESS-C product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

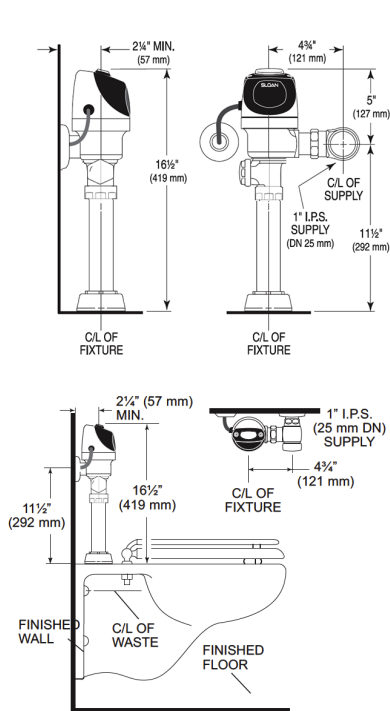

When installing the G2® Hardwire in a handicap stall:
Per the ADA Guidelines (section 604.9.4) it is recommended that the grab bars be split or shifted to the wide side of the stall.

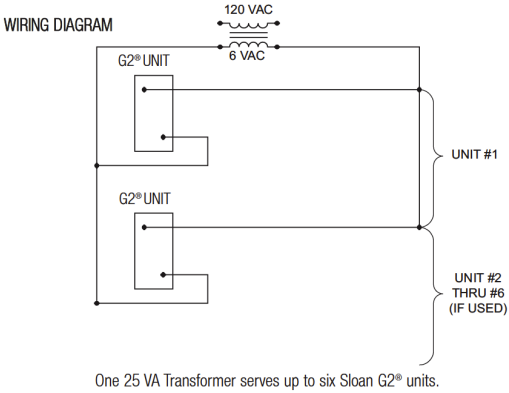

One 25 VA Transformer serves up to six Sloan G2® units.