



Sloan® Sensor Flushometer

SLOAN RESS-U-MC-0.125-CP

Product description

0.125 gpf, Dual-Filtered Fixed Bypass Diaphragm, Polished Chrome Finish, Single Flush, Electrical Override, Battery, Sloan® Exposed Sensor Urinal Flushometer.

Compliances & Certifications



(ADA Compliant*, cUPC Green Certified, IAPMO)

Code 3379037

Finish

 Polished Chrome (CP)

Downloads

-  [G2 and ECOS Single Flush Optima Plus Valve Installation Instructions duplicate.pdf](#)
-  [Sloan Optima Plus Flushometers Repair and Maintenance Guide.pdf](#)
-  [Flushometer Pressure Gauges.pdf](#)
-  [Retrofits Brochure.pdf](#)
-  [Additional Downloads](#)

Videos

-  [Sloan – Company Overview](#)

Details

- Flush Volume: 0.125 gpf (0.5 lpf)
- Finish: Polished Chrome (CP)
- Power Type: Battery
- Valve: Diaphragm
- Bypass: Dual-Filtered Fixed Bypass Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Urinal
- Override: Electrical

Features

- ADA Compliant OPTIMA Plus® Battery Powered Infrared Sensor for automatic “No Hands” operation
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Latching Solenoid Operator
- Chrome Plated, Die Cast Metal Cover Assembly with Tempered Glass Window
- Four (4) Size AA Batteries factory installed
- “Low Battery” Flashing LED
- Initial Set-up Range Indicator Light (first 10 minutes)
- Chrome Plated Metal Handle Cap
- Installation Tools Provided
- Valve shall be in compliance to the applicable sections of ASSE 1037

Electrical specifications

- Flush Delay: 1 seconds

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the SLOAN RESS-U-MC product?


[View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

ROUGH-IN

(on existing Sloan Model 186 Flushometer)

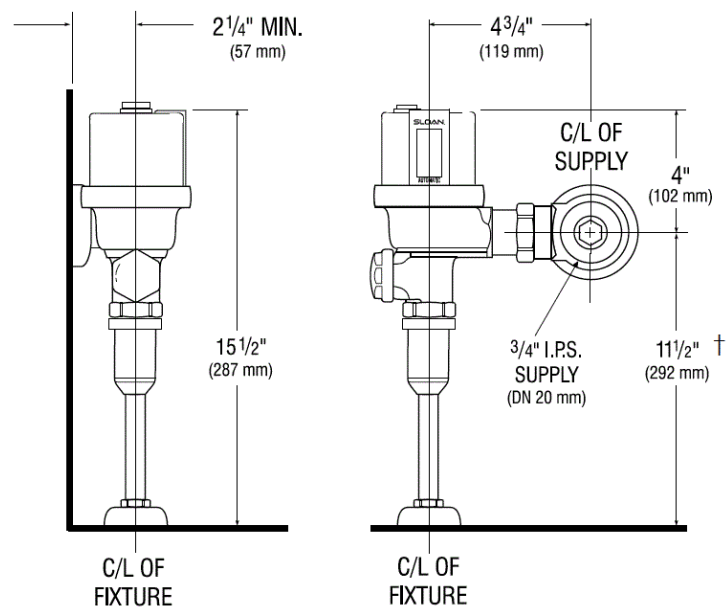

† Typical Water Supply Rough-in dimensions of existing Sloan Model 186 Flushometer.