


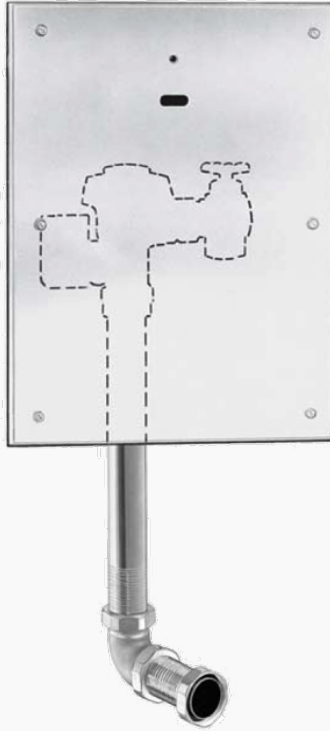

Royal® Sensor Flushometer

ROYAL 611 ESS WB

Product description

Royal® Concealed Sensor Hardwired Water Closet Flushometer.

Compliances & Certifications



(BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, Green Globes Water, LEED Water, Satisfies LEED Credits)

Listed compliances and certifications may vary based on product variation.

Finish



Available in Polished Chrome (CP).

Downloads

- [Royal ESS Concealed with Wall Box Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Videos

- [ESS Flushometer](#)

Features

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- OPTIMA® EL-1500-L Self-Adaptive Infrared Sensor with Indicator Light
- Non-Hold-Open Integral Solenoid Operator
- 13" x 17" EASY ACCESS. Wall Box with Stainless Steel Access Panel and Vandal Resistant Screws
- 1" I.P.S. Wheel Handle Bak-Chek. Angle Stop
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker
- Elbow Flush Connection and Coupling for 1-1/2" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- Sweat Solder Adapter
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Integral Solenoid Operator, Fixed Metering Bypass
- External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID™ Technology
- Diaphragm, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber
- Compound for Chloramine Resistance
- Transformer not included- order separately

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.