

OPTIONS**Flush Volume**

- 1.0 gpf (3.8 Lpf) (1.0)
- 0.5 gpf (1.9 Lpf) (0.5)
- 1.5 gpf (5.7 Lpf) (1.5)

Water Efficiency

- Low Consumption
- High Efficiency
- Water Saver

Control Stop

- Ground Joint (GJ)
- 1"

Vacuum Breaker

- Less (XYV)

Adapter

- Sweat Solder Adapter Kit

Special Features

- Whitworth Thread (WWT)

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

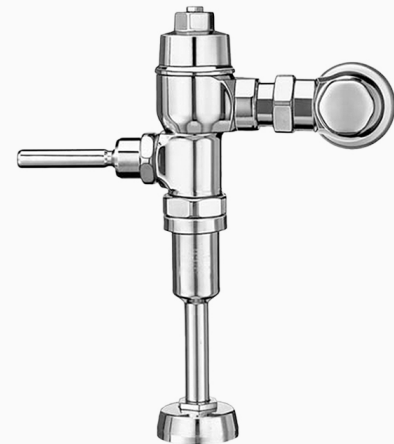


Image for a standard NAVAL 186 shown

DESCRIPTION

Naval Exposed Manual Urinal Flushometer

FEATURES

- Factory set flush volume of 1.0 gpf/3.8 Lpf has an adjustable range of 0.5 gpf/1.7 Lpf to 3.0 gpf/11.4 Lpf
- Non-hold-open oscillating handle, Bak-Chek™ control stop and self-cleaning Xpelor Metering By-Pass ensure reliable operation and accurate flush delivery
- Available with adjustable or ground joint supply stop (ground joint recommended for salt water applications)
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Naval Piston Type Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Naval Repair and Maintenance Guide](#)
- [Additional Downloads](#)