

OPTIONS

Flush Volume

- 1.6 gpf (6.0 Lpf) (1.6)
- 3.5 gpf (13.2 Lpf) (3.5)
- 1.28 gpf (4.8 Lpf) (1.28)

Water Efficiency

- Water Saver
- Low Consumption

Bypass

- Dual-Filtered Fixed Bypass Diaphragm

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- UPC Certified
- cUPC Certified
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

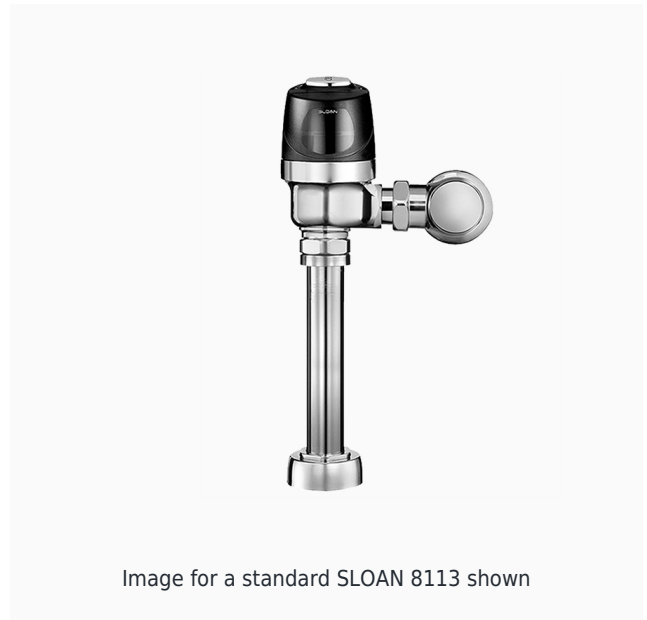


Image for a standard SLOAN 8113 shown

DESCRIPTION

Sloan® Exposed Sensor Water Closet Flushometer

FEATURES

- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [G2 and ECOS Single Flush Optima Plus Valve Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Optima Plus Flushometers Repair and Maintenance Guide](#)
- [Additional Downloads](#)