

OPTIONS

Flush Volume

- 0.125 gpf (0.5 Lpf) (0.125)
- 0.25 gpf (0.9 Lpf) (0.25)
- 0.5 gpf (1.9 Lpf) (0.5)

Finish

- Brushed Nickel (BN)
- Brushed Stainless (SF)
- Graphite (GR)
- Polished Brass (PB)
- Polished Chrome (CP)


Compliances & Certifications

- ADA Compliant
- BAA Compliant
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits
- UPC Certified
- WaterSense Listed
- cUPC Green Certified
- BABAA Compliant

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

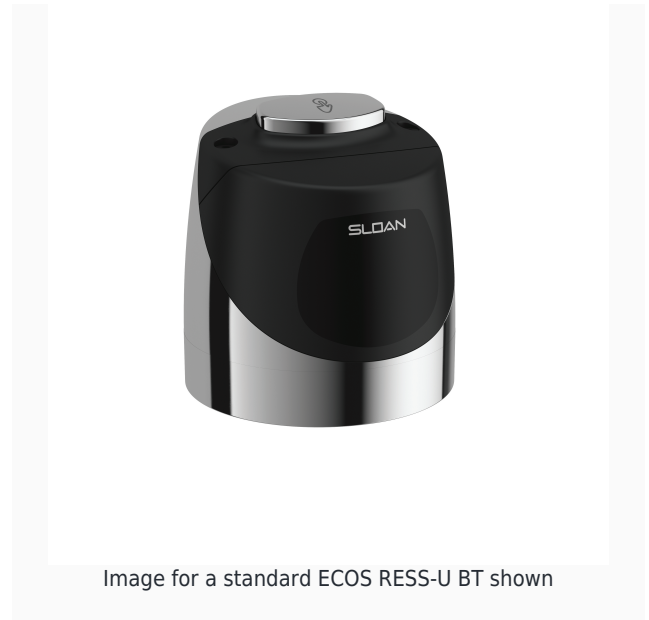

DESCRIPTION

ECOS® Exposed Sensor Urinal Retrofit Flushometer

FEATURES

- Wireless connected device for real time diagnostic and adjustable product settings
- Sloan Connect App® readily available for smart phone and tablet devices
- “Low Battery” Flashing LED
- Sweat solder adapter with cover tube and cast wall flange with set screw
- Four (4) Size AA Battery Power Source
- Operates by means of an infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flex Tube Diaphragm designed for improved life and reduced maintenance
- Engineered Metal Cover with replaceable Lens Window
- PERMEX® Synthetic Rubber Diaphragm with Dual-Filtered Fixed Bypass
- Courtesy Flush® Override Button
- Valve shall be in compliance to the applicable sections of ASSE 1037

DOWNLOADS

- [Sloan ECOS Single/Dual-Flush Flushometer & Retrofit Valve Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)

- [Additional Downloads](#)

VIDEOS

-  PVD Special Finishes
-  Sloan Connect App®