



Urinal & Flushometer Combo

WEUS-7010.1331-STG

Product description

SloanTec® Glaze, SU-7019 Urinal and ROYAL 195 ESS Flushometer.

Compliances & Certifications



(ADA Compliant*, CalGreen Compliant, CEC Compliant, EPD, HPD, IAPMO, EPA WaterSense Listed, WELL Building Standard)

Code 70101331

Downloads

- [Small Spud Urinal Installation Instructions.pdf](#)
- [Royal ESS Concealed and Exposed Installation Instructions.pdf](#)
- [SS:ST:SU:WETS:WEUS Fixtures Repair and Maintenance Guide.pdf](#)
- [Optima ESS Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 0.125 gpf (0.5 lpf)

Features

- Complete urinal system including Royal flushometer ESS Designed to maximize performance
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly
- Permanent SloanTec® hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces

Components



- Flushometer: Code 3453265
- Urinal: Code 1177019

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice. @AttributePlain:*Compliant with ADA accessibility requirements when installed according to ADA standards.

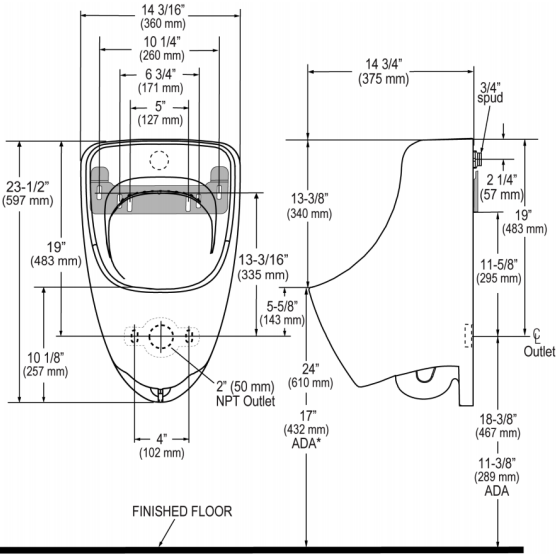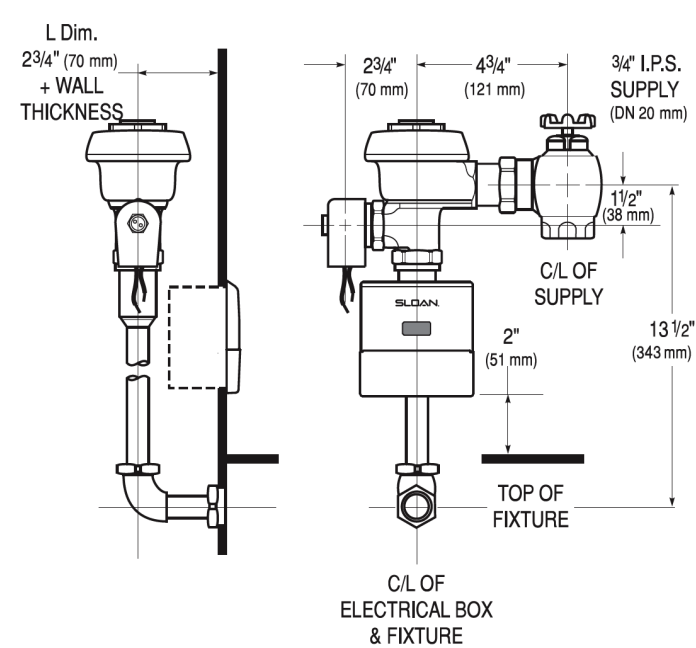

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.