



Royal® Manual Specialty Flushometer

ROYAL 952-1.6-BSS-WB1A-MBPM

Product description

1.6 gpf, Stainless Steel Finish, Fixture Connection Rear Spud, Single Flush, 2"-10.75" L Dimension, Metal Button Panel Mount Push Button, Standard size (wall box included) Wall Box, Royal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BABAA Compliant, IAPMO, cUPC Certified)

Code 3914853

Finish

 Stainless Steel (BSS)

Downloads

- [Royal_Regal Series 900 Hydraulic Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 1.6 gpf (6.0 lpf)
- Finish: Stainless Steel (BSS)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Rear Spud
- Rough-in Dimension: 14.5" (368mm)
- Spud Coupling: 1.5" (38mm)
- Supply Pipe: 1" (25mm)
- L Dimension: 2"-10.75" (51-273mm)
- Wall Box: Standard size (wall box included) (WB1A)
- Push Button: Metal Button Panel Mount (MBPM)

Features

- Various types of push-button flush actuators, which can be remotely positioned
- Flush volumes start as low as 1.6 gpf/6.0 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open
- Vandal-resistant stop cap to facilitate security
- Made from rough brass
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty


[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the ROYAL 952 product? [View the general spec sheet with all options.](#)
[Find a compatible urinal](#) for this flushometer.
[Find a compatible water closet](#) for this flushometer.

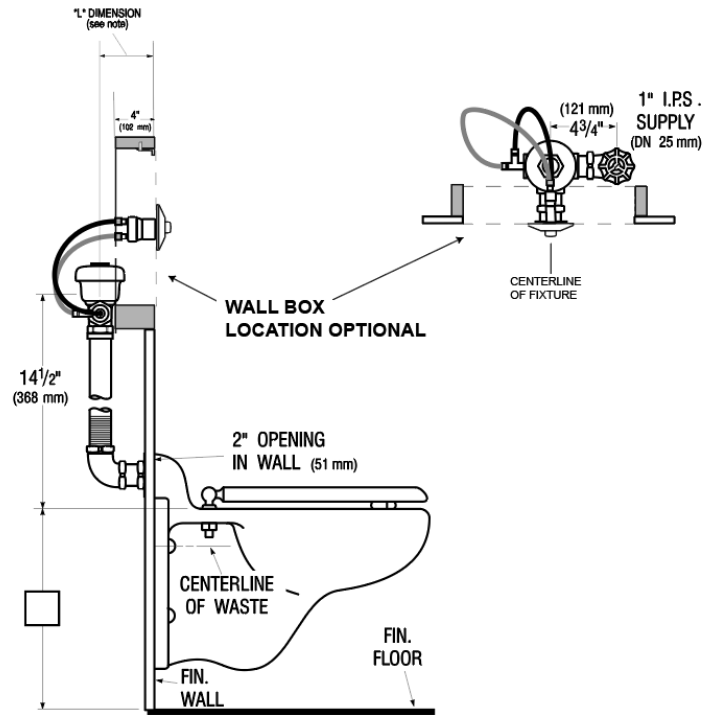

NOTE: "L" Dimension is the Wall Thickness (to the nearest whole inch) plus 2 3/4". Specify "L" Dimension when ordering Flushometer.