



Urinal & Flushometer Combo

WEUS-7710.3004-STG

Product description

SloanTec® Glaze, SU-7419 Urinal and CX 8198 Flushometer.

Compliances & Certifications



(BAA Compliant, BABAA Compliant)

Code 77103004

Downloads

- [Model SU-7409-7419 Urinal Installation Instructions.pdf](#)
- [CX 8158_8198 Installation Instructions.pdf](#)
- [CXSensor.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 0.125 gpf (0.5 lpf)

Features

- Fixed volume piston with filtered O-ring bypass
- Front access wall plate requires no rear access plumbing chase
- Sensor activated, hands-free operation
- Battery operated with hardwired option
- Electronic override button
- Low Battery indicator light
- Vandal resistant wall plate
- Adjustable flush connection
- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- 3/4" I.P.S. rear spud inlet
- 2" NPT outlet flange
- Fully concealed trapway
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested

Components


- Flushometer: Code 3400320
- Urinal: Code 1177419

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

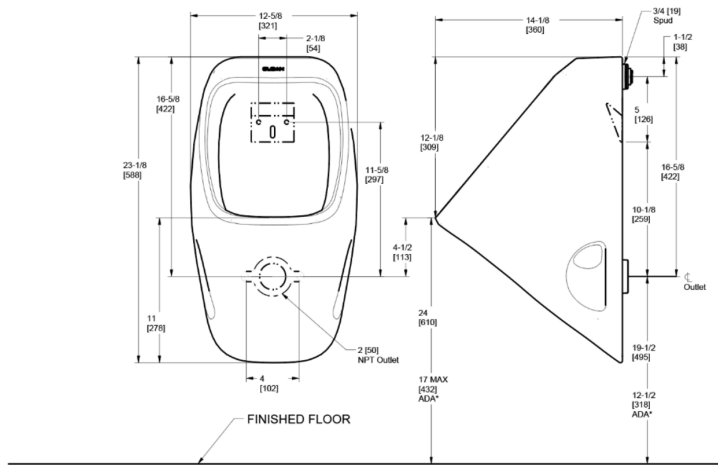

NOTE: ADA urinal rim height requirements allow all heights 17\" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2\" rim height or less to ensure compliance.

NOTE: ADA urinal rim height requirements allow all heights 17\" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2\" rim height or less to ensure compliance.

