

OPTIONS

Flush Volume

- 1.6 gpf (6.0 Lpf) (1.6)
- 3.5 gpf (13.2 Lpf) (3.5)
- 6.5 gpf (24.6 Lpf) (6.5)

Water Efficiency

- Low Consumption
- Water Saver

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- Made in the USA
- UPC Certified
- cUPC Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

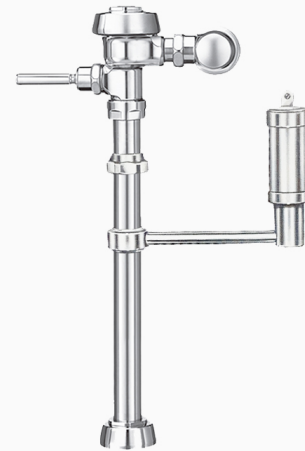


Image for a standard ROYAL 118 shown

DESCRIPTION

Royal® Exposed Manual Service Sink Flushometer

FEATURES

- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Quiet exposed with drip pocket
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- NOTE: used in conjunction with bedpan washer spray (Not furnished by Sloan)

DOWNLOADS

- [Royal Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Royal Manual Diaphragm Flushometer Repair and Maintenance Guide](#)
- [Additional Downloads](#)