

Variation Not Shown: Less Push Button, Sold Separately

**Royal® Manual Specialty Flushometer**

# ROYAL 952-3.5-RB

## Product description

3.5 gpf, Rough Brass Finish, Fixture Connection Rear Spud, Single Flush, 2”-10.75” L Dimension, Royal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

## Compliances & Certifications

(ADA Compliant*, BAA Compliant, IAPMO, UPC Certified)

**Code 3014801**

### Finish

Rough Brass (RB)

### Downloads

- Royal_Regal Series 900 Hydraulic Installation Instructions.pdf
- Control Stop Repair and Maintenance Guide.pdf
- Flush Connections Flanges Repair and Maintenance Guide.pdf
- Additional Downloads

### Videos

- Sloan – Company Overview



⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

## Details

- Flush Volume: 3.5 gpf (13.2 lpf)
- Finish: Rough Brass (RB)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Rear Spud
- Rough-in Dimension: 14.5” (368mm)
- Spud Coupling: 1.5” (38mm)
- Supply Pipe: 1” (25mm)
- L Dimension: 2”-10.75” (51-273mm)

## Features

- Various types of push-button flush actuators, which can be remotely positioned
- Flush volumes start as low as 1.6 gpf/6.0 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open
- Vandal-resistant stop cap to facilitate security
- Made from rough brass
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

## Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

## Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

## Warranty

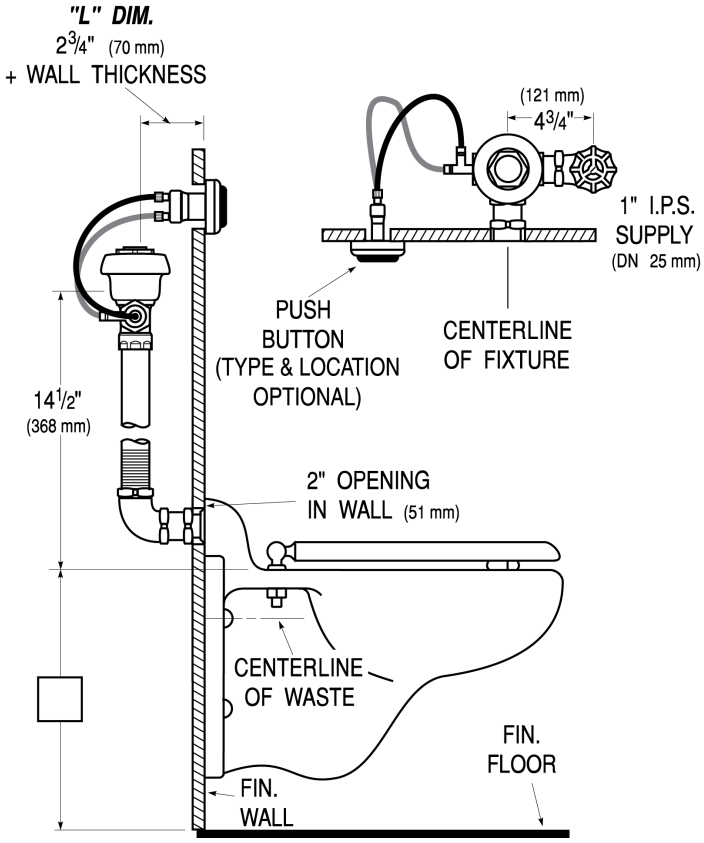
View Warranty Information

## Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the ROYAL 952 product? View the general spec sheet with all options.
Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.


"L" DIM.
2 3/4" (70 mm)
+ WALL THICKNESS
(121 mm)
4 3/4"
1" I.P.S.
SUPPLY
(DN 25 mm)
PUSH
BUTTON
(TYPE & LOCATION
OPTIONAL)
CENTERLINE
OF FIXTURE
14 1/2"
(368 mm)
2" OPENING
IN WALL (51 mm)
CENTERLINE
OF WASTE
FIN.
FLOOR
FIN.
WALL