



Retrofit Sensor Flushometer

EBV200A-CP

Product description

Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Battery, Retrofit Exposed Sensor Urinal/Water Closet Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BABAA Compliant, IAPMO, cUPC Certified)

Code 3325201

Finish

 Polished Chrome (CP)

Downloads

- [EBV 200 Smooth Installation Instructions.pdf](#)
- [EBV-200-A Repair and Maintenance Guide.pdf](#)
- [Retrofits Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Finish: Polished Chrome (CP)
- Power Type: Battery
- Valve: Diaphragm
- Piston
- Fixture Type: Urinal/Water Closet
- Fixture Connection: Top Spud

Features

- Battery powered
- Installs over existing handle
- Estimated 2 year battery life
- True Mechanical Override for manual flush

Electrical specifications

- Arming Delay: 8 seconds
- Control Circuit:
 - 6 VDC Input
 - 72 Hour Sentinel Flush
 - Solid State
- Sensor Range: 26"-32" (660 - 813mm)

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.


*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the EBV200A product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

FRONT VIEW

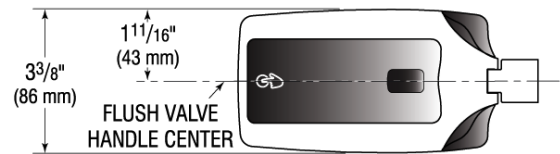

TOP VIEW

