


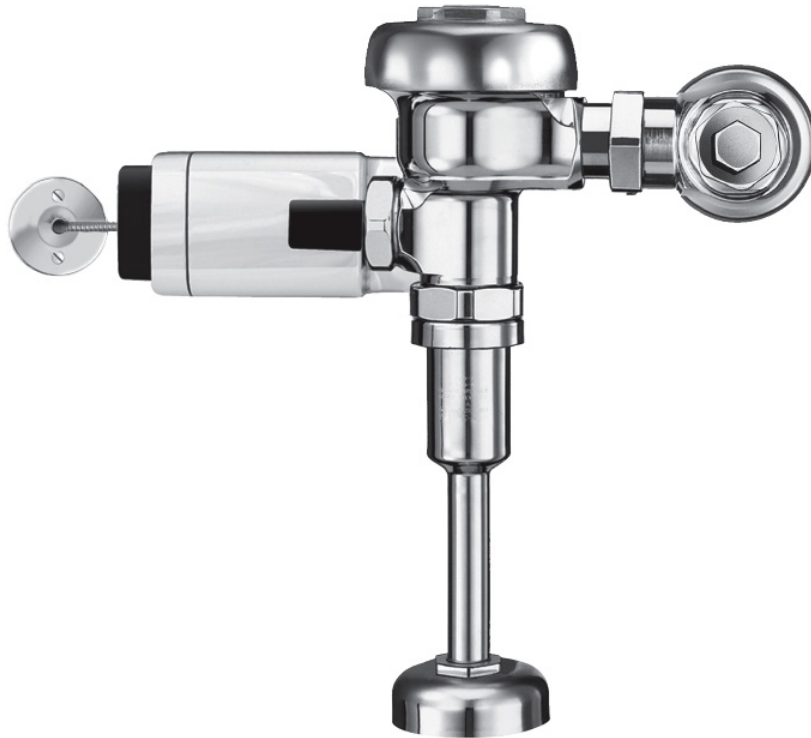

Regal® Sensor Flushometer

REGAL 186 SFSM-0.5-XL-CP-TMO-HW

Product description

0.5 gpf, XL Sweat Solder Adapter Kit, Polished Chrome Finish, 0.75" Flush Connection, Fixture Connection Top Spud, Single Flush, 0.75" Inlet, 3/4" Control Stop, True Mechanical Override, Hardwired, Infrared, Regal® Exposed Sensor Urinal Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BABAA Compliant, BREEAM Water Credit, Green Globes Water, IAPMO, LEED Water, UL Certified (US and Canada), cUPC Certified, EPA WaterSense Listed)

Code 3982527

Finish

 Polished Chrome (CP)

Downloads

- [Regal XL Exposed Installation Instructions.pdf](#)
- [Regal XL Exposed \(SP\) Installation Instructions.pdf](#)
- [EBV-500_550-A Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Flushometers Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 0.5 gpf (1.9 lpf)
- Finish: Polished Chrome (CP)
- Power Type: Hardwired (HW)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Urinal
- Fixture Connection: Top Spud
- Rough-in Dimension: 11.5" (292mm)
- Spud Coupling: 0.75" (19mm)
- Supply Pipe: 0.75" (19mm)
- Override: True Mechanical (TMO)
- Control Stop: 3/4"
- Flush Connection: 0.75" (19mm)
- Adapter: XL Sweat Solder Adapter Kit (XL)

Features

- Flush volumes start as low as 0.5 gpf/1.9 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents urinal from exceeding intended flush volume
- Integrity of the product is maintained with control stop plug
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Electrical specifications

- Flush Delay: 1 seconds
- Sensor Range: 15"-30" (381 - 762mm)
- Transformers (Specify Separately):
 - EL-386/0345095 (Up to 1 Flushometer)
 - EL-451/0345125 (Up to 6 Flushometers)

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

WaterSense compliant when used with a 0.5 gpf (1.9 lpf)

WaterSense fixture.


Looking for other variations of the REGAL 186 SFSM product?

[View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

EL-700-A Single-Flush Side Mount Hardwired unit
shown on a Regal 186 urinal flushometer

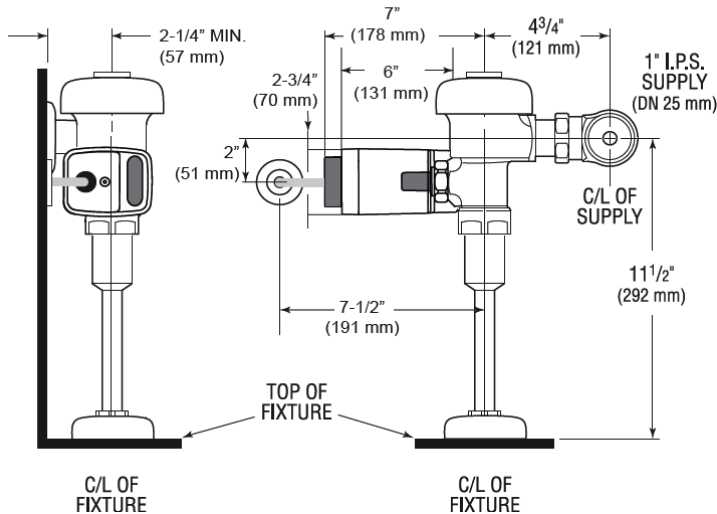

Side Mount Hardwired Unit Dimensions

