


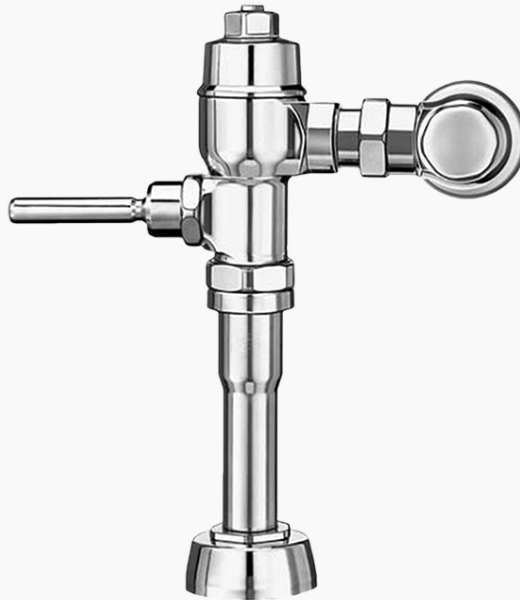

Naval Manual Flushometer

NAVAL 180

Product description

Naval Exposed Manual Urinal Flushometer.

Compliances & Certifications



(ADA Compliant, BAA Compliant)

Listed compliances and certifications may vary based on product variation.

Finish



Available in Polished Chrome (CP).

Downloads

- [Naval Piston Type Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Features

- Factory set flush volume of 1.0 gpf/3.8 Lpf has an adjustable range of 0.5 gpf/1.7 Lpf to 3.0 gpf/11.4 Lpf
- Non-hold-open oscillating handle, Bak-Chek™ control stop and self-cleaning Xpelor Metering By-Pass ensure reliable operation and accurate flush delivery
- Available with adjustable or ground joint supply stop (ground joint recommended for salt water applications)
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.