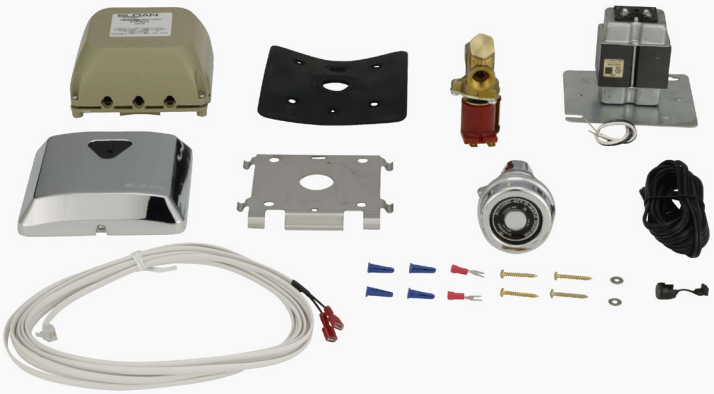

PWT™ Accessory

MCR-215

Product description

PWT System Infrared Shower Sensor Controller. Infrared sensor-activated, electronic shower control for a single, pre-mixed shower.

Compliances & Certifications

(BAA Compliant)

Code 3375019

Downloads

- Programmed Water Technologies (PWT) Brochure.pdf
- Additional Downloads

Videos

- Sloan – Company Overview

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Features

- Infrared, sensor-activated shower control for single, pre-mixed shower
- Water run-times and sensor range are adjustable
- Control module may be located remotely as far as 35 feet from sensor using additional PWT extension cord kits
- Waterproof, NEMA 6-compliant sensor module
- Diagnostic LED indicators in control module
- May be paired with Sloan Act-O-Matic Standard or Institutional style showerheads
- Infrared sensor-activated, electronic shower control for a single, pre-mixed shower
- Water-proof (NEMA 6) sensor module
- Visible LED target detection
- Infrared sensor module, controller, solenoid, 120 VAC/24 VAC transformer, 20' power cord kit and mounting hardware for sensor and controller
- Operates on 24 V AC
- Adjustable sensing range
- Adjustable run time
- 24 VAC brass body solenoid with integral "Y" strainer
- Diagnostic LED indicators in control module
- Control module may be located remotely as far as 35' from sensor using additional MICRO Plumb® extension cord kits

Warranty

View Warranty Information

Notes

All information contained within this document subject to change without notice.

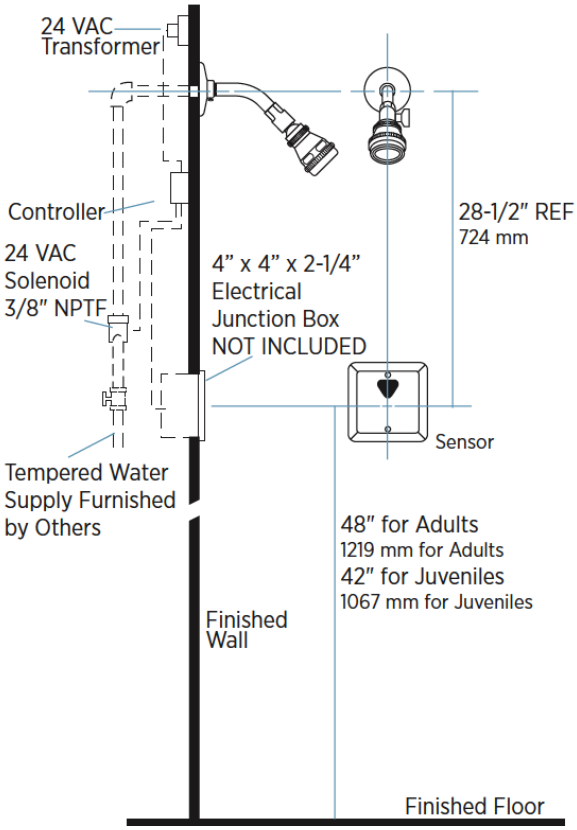
24 VAC
Transformer
Controller
24 VAC
Solenoid
3/8" NPTF
Tempered Water
Supply Furnished
by Others
4" x 4" x 2-1/4"
Electrical
Junction Box
NOT INCLUDED
28-1/2" REF
724 mm
Sensor
48" for Adults
1219 mm for Adults
42" for Juveniles
1067 mm for Juveniles
Finished
Wall
Finished Floor