



Urinal & Flushometer Combo

WEUS-7000.1411-0.125-CP-HW

Product description

0.125 gpf, Dual-Filtered Bypass, Polished Chrome Finish, 0.75" Flush Connection, Fixture Connection Top Spud, Single Flush, 3/4" Control Stop, Electrical Override, Hardwired, Infrared, SU-7009 Urinal and ECOS 186 HW Flushometer.

Compliances & Certifications



(ADA Compliant*, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, EPD, Green Globes Water, HPD, IAPMO, LEED Water, Satisfies LEED Credits, EPA WaterSense Listed, WELL Building Standard)

Code 70001411

Downloads

- [Small Spud Urinal Installation Instructions.pdf](#)
- [ECOS Single Flush HW Flushometer and Retrofit.pdf](#)
- [SS:ST:SU:WETS:WEUS Fixtures Repair and Maintenance Guide.pdf](#)
- [ECOS HW Repair and Maintenance Guide.pdf](#)
- [Fixture Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 0.125 gpf (0.5 lpf)

Features

- Complete urinal system including ECOS HW flushometer Designed to maximize performance
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

Components

- Flushometer: Code 3370440
- Urinal: Code 1107009



Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

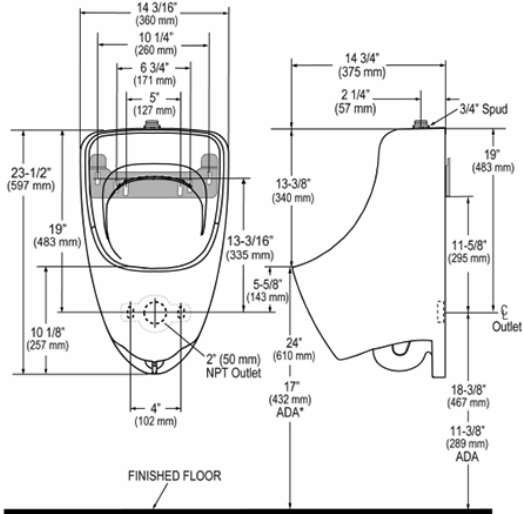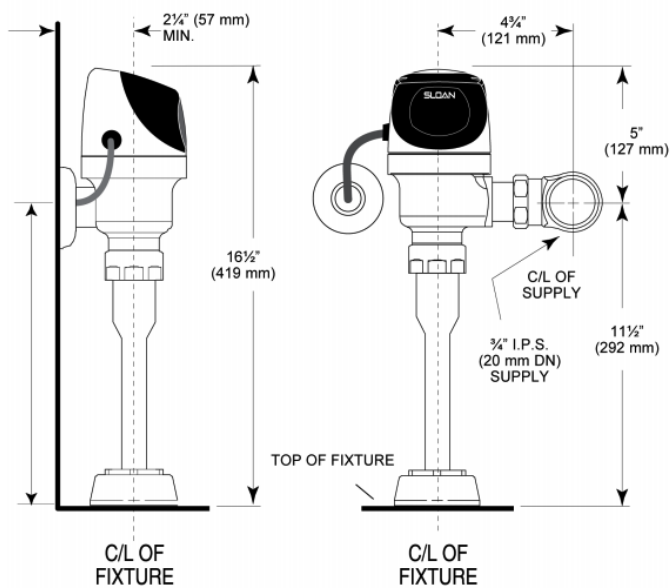

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.