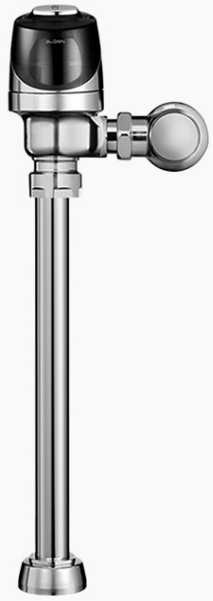

G2 Sensor Flushometer

G2 8114

Product description

G2 Exposed Sensor Water Closet Flushometer.

Compliances & Certifications

(ADA Compliant*, BAA Compliant, IAPMO, cUPC Certified)

Listed compliances and certifications may vary based on product variation.

Finish

Available in Polished Chrome (CP).

Downloads

- G2 and ECOS Single Flush Optima Plus Valve Installation Instructions duplicate
- G2 Repair and Maintenance Guide
- Control Stop Repair and Maintenance Guide
- Additional Downloads

Videos

- Sloan – Company Overview

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Features

- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Battery Specifications

Usage	4-AA Battery Service Life†			
	14.5 yrs	12 yrs	7.2 yrs	6 yrs
per month	500	1,000	3,000	4,000
per day	25	50	150	200

† Service life varies according to actual usage and restroom conditions
Battery shelf life: Alkaline= ~10 years - Lithium= ~25 years

* Service life varies according to actual usage & restroom conditions
Battery shelf life: Alkaline= ~10 years - Lithium= ~25 years

Warranty

View Warranty Information

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.