


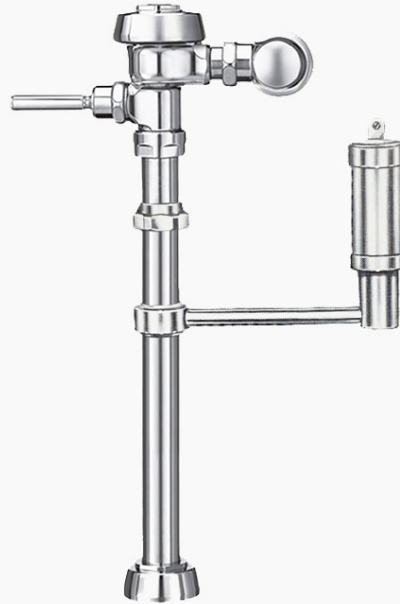

Royal® Manual Flushometer

ROYAL 118-1.6-CP

Product description

1.6 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Royal® Exposed Manual Service Sink Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, IAPMO, Made in the USA, cUPC Certified)

Code 3010626

Finish



Downloads

- [Royal Exposed Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 1.6 gpf (6.0 lpf)
- Finish: Polished Chrome (CP)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Service Sink
- Fixture Connection: Top Spud

Features

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Quiet exposed with drip pocket
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- NOTE: used in conjunction with bedpan washer spray (Not furnished by Sloan)

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the ROYAL 118 product? [View the general spec sheet with all options.](#)
[Find a compatible urinal](#) for this flushometer.
[Find a compatible water closet](#) for this flushometer.

