

Elongated Floor-Mounted Standard Gravity Toilet

WETS-4009.4011

Product description

Standard, Floor-Mounted 1.1 gpf (4.2 lpf) Standard 12” Rough-in Left Handle.

Compliances & Certifications

(CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Green Certified, NOM Certified, EPA WaterSense Listed)

Code WETS-4009.4011

Downloads

- WETS 4000 Series Installation Instructions.pdf
- Sloan Gravity Toilets Brochure.pdf
- Additional Downloads

Videos

- Sloan – Company Overview

Details

- Flush Volume: 1.1 gpf (4.2 lpf)
- Handle Side: Left

Features

- White Vitreous China
- Elongated bowl
- Floor mounted, floor outlet
- 12” (305mm) rough-in
- Chrome metal flush handle - left hand
- Raised deck eliminates tank rocking and makes cleaning easy
- Powerful Centriflo® siphon jet flushing action achieves 800g Map score
- Water spot area: 11 ¼ x 9¾ (286 mm x 248 mm)
- 2⊠” (54mm) fully glazed trapway
- Closet bolts and caps included
- Toilet seat and wax ring not included

Components

- Bowl: Code 2104009
- Tank: Code 2104011

Recommended Seats

- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
- Church - 295CT/295SSCT & 2155CT/2155SSCT
- Church - 1580CT

Plumbing System Requirements

- Maximum Static Pressure: 80 PSI (552 kPa)
- Minimum Static Pressure: 20 PSI (138 kPa)

Warranty

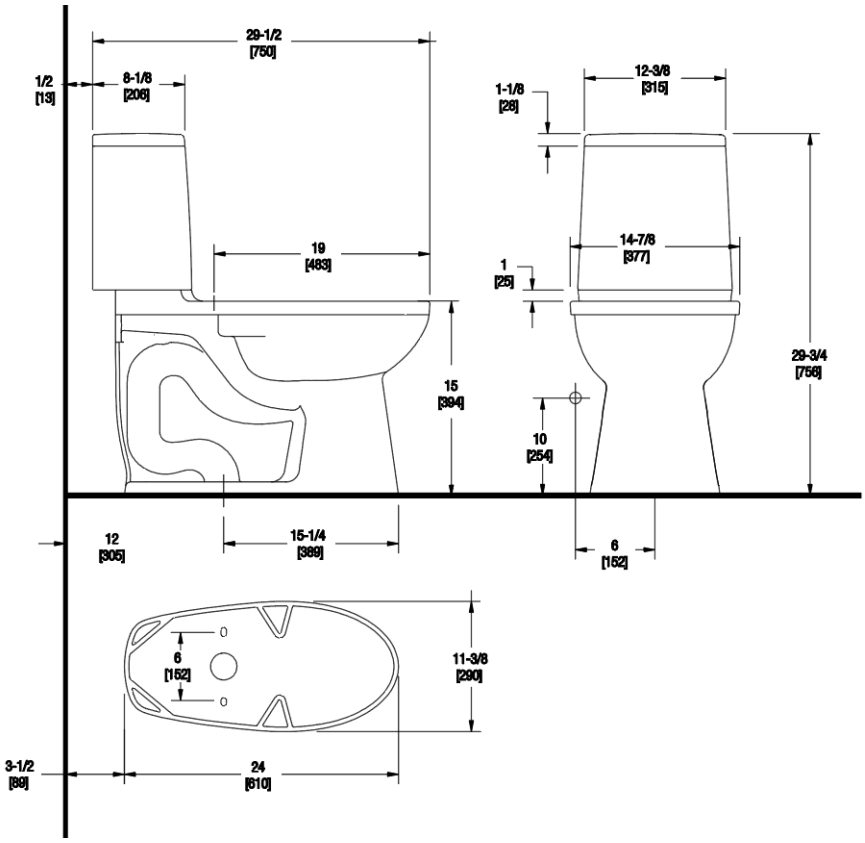
View Warranty Information

Notes

All information contained within this document subject to change without notice.

All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

Static load tested according to the procedure outlined in Section 6.7 of ASME A112.19.2. Not recommended for bariatric use.
WaterSense compliant when used with a WaterSense compliant flushometer.


29-1/2
[750]
1/2
[13]
8-1/8
[206]
19
[483]
15
[394]
12
[305]
15-1/4
[389]
6
[152]
6
[152]
11-3/8
[290]
3-1/2
[89]
24
[610]
1-1/8
[28]
12-3/8
[315]
14-7/8
[377]
1
[25]
29-3/4
[756]
10
[254]
6
[152]