Stainless Steel Sink

ESS-2200

Product description

Stainless Steel 2-Station Scrub Sink.

Compliances & Certifications

(ADA Compliant*, BAA Compliant, BABAA Compliant, cUPC Certified)

Code ESS-2200

Downloads

- Optima ESS-2000_3000 Series Installation Instructions.pdf
- Optima ESS-2000_3000 Series (Spanish) Installation Instructions.pdf
- EHS-1000-ESS-2000-3000 Series Repair and Maintenance Guide.pdf
- Sinks - Full Line Brochure.pdf
- Additional Downloads

Videos

- Sloan – Company Overview

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Details

- Material:
  - Stainless Steel
- Mounting: Wall-Mounted
- Width: 60” (1524mm)

Features

Double Station Stainless Steel Scrub Sink with Sensor Activated, 24 VAC, Chrome Plated Brass Hand Washing Faucets with the following features:

- Sink constructed from 16 gauge, Type 304 stainless steel with bead blast finish on sink bowl interior for superior wash-down characteristics
- 16 gauge “lift-out” style front access panel for easy maintenance access
- Sloan OPTIMA Faucet for hands-free operation
- Sink is shipped pre-plumbed for easy installation

Recommended specifications

Sloan Stainless Series Scrub Sink (code no.3851189) model no. ESS 2200-H-BDT 2 Station w/ 3305712 Sensor. Product to be made of 16 gauge type 304 stainless steel with Sloan sensor faucets. Sink design to be ADA compliant.

Suggested Faucets

Warranty

View Warranty Information

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Find a compatible faucet for this sink.
Find a matching soap dispenser for this sink.

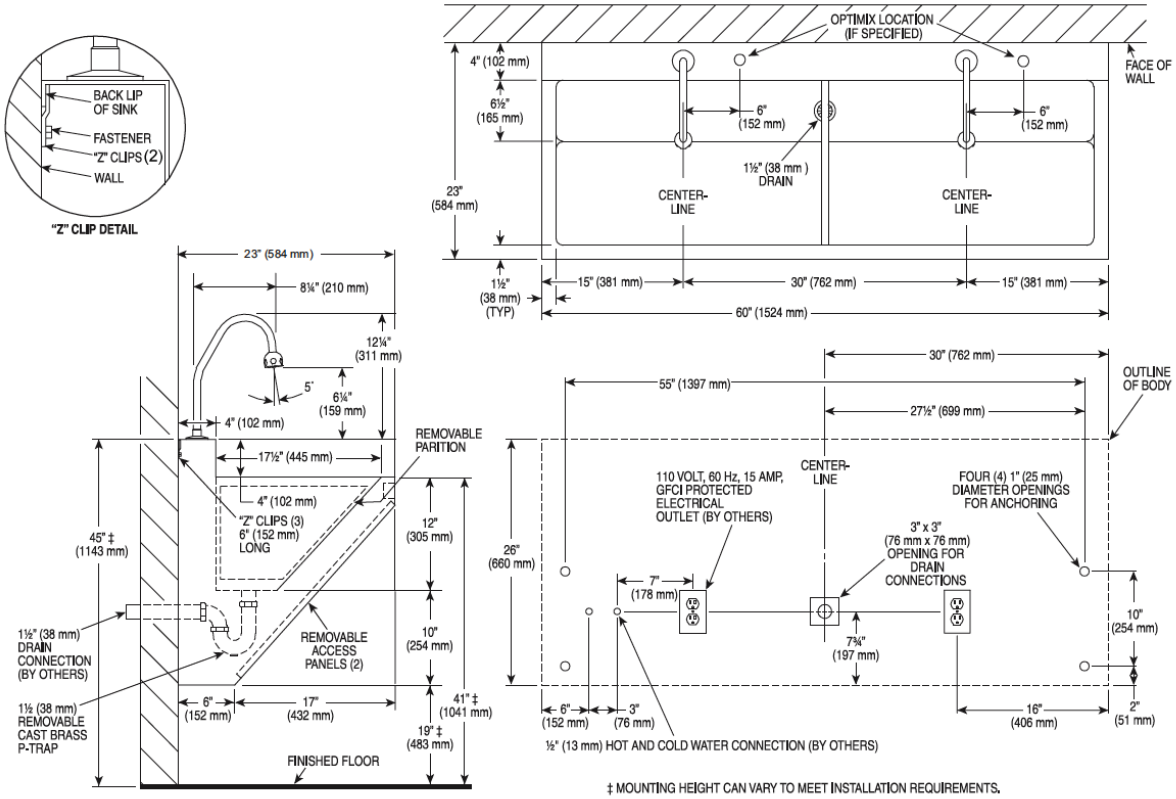
BACK LIP OF SINK
FASTENER
"Z" CLIPS (2)
WALL
"Z" CLIP DETAIL
OPTIMIX LOCATION (IF SPECIFIED)
FACE OF WALL
4" (102 mm)
6½" (165 mm)
6" (152 mm)
6" (152 mm)
1½" (38 mm) DRAIN
23" (584 mm)
CENTER-LINE
CENTER-LINE
1½" (38 mm) (TYP)
15" (381 mm)
30" (762 mm)
15" (381 mm)
60" (1524 mm)
23" (584 mm)
8¼" (210 mm)
12¼" (311 mm)
5°
6¼" (159 mm)
4" (102 mm)
17½" (445 mm)
REMOVABLE PARITION
4" (102 mm)
"Z" CLIPS (3) 6" (152 mm) LONG
45" ‡ (1143 mm)
12" (305 mm)
10" (254 mm)
1½" (38 mm) DRAIN CONNECTION (BY OTHERS)
REMOVABLE ACCESS PANELS (2)
1½ (38 mm) REMOVABLE CAST BRASS P-TRAP
6" (152 mm)
17" (432 mm)
41" ‡ (1041 mm)
19" ‡ (483 mm)
FINISHED FLOOR
30" (762 mm)
55" (1397 mm)
27½" (699 mm)
OUTLINE OF BODY
CENTER-LINE
110 VOLT, 60 Hz, 15 AMP, GFCI PROTECTED ELECTRICAL OUTLET (BY OTHERS)
FOUR (4) 1" (25 mm) DIAMETER OPENINGS FOR ANCHORING
3" x 3" (76 mm x 76 mm) OPENING FOR DRAIN CONNECTIONS
26" (660 mm)
7" (178 mm)
7¾" (197 mm)
10" (254 mm)
6" (152 mm)
3" (76 mm)
16" (406 mm)
2" (51 mm)
½" (13 mm) HOT AND COLD WATER CONNECTION (BY OTHERS)
‡ MOUNTING HEIGHT CAN VARY TO MEET INSTALLATION REQUIREMENTS.