


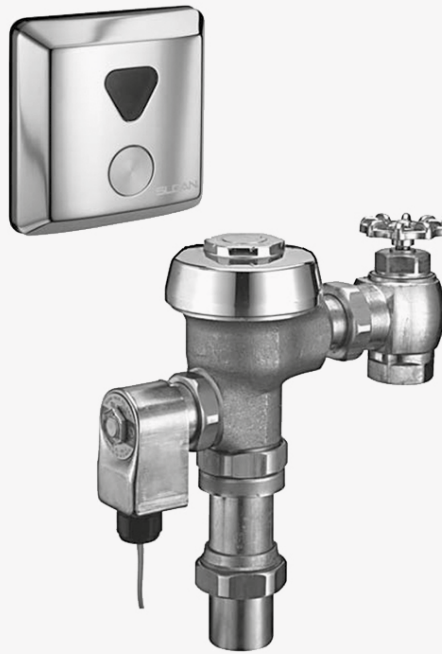

Sloan® Sensor Flushometer

SLOAN 150 ESS-ES-SM-3.5-RB-HW-24V

Product description

3.5 gpf, Rough Brass Finish, Fixture Connection Not Included, Single Flush, 2"-10.75" L Dimension, Hardwired, Sensor-Operated with Modular Plug, 24V, Sloan® Concealed Sensor Hardwired Water Closet Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BABAA Compliant, IAPMO, UPC Certified)

Code 3781502

Finish



Downloads

- [Optima ESS Repair and Maintenance Guide.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [ESS Flushometer](#)

Details

- Flush Volume: 3.5 gpf (13.2 lpf)
- Finish: Rough Brass (RB)
- Power Type: Hardwired (HW)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Not Included
- Supply Pipe: 1" (25mm)
- L Dimension: 2"-10.75" (51-273mm)
- Voltage: 24V (24V)

Features

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Electrical specifications

- Arming Delay: 8 seconds
- Sensor Range: 0"-36" (0 - 914mm)
- Solenoid Operator: 24 VAC
- Transformers (Specify Separately):
 - EL-342/0345999
 - EL-154/0345154

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the SLOAN 150 ESS product?

[View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

