



Designer Washdown Urinal

SU-7419-STG

Product description

SloanTec® Glaze, Vitreous China Washdown Urinal.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, CalGreen Compliant, cUPC Green Certified, EPD, HPD, IAPMO, EPA WaterSense Listed)

Code 1177419

Downloads

- [Model SU-7409-7419 Urinal Installation Instructions.pdf](#)
- [Designer Urinal Brochure.pdf](#)
- [Fixture Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 0.125–1.0 gpf (0.5–3.8 lpf)
- Flush Volume determined by the Flushometer used with the Fixture
- Nominal Dimensions: 14.125" x 12.625" x 23.125" (359 x 321 x 587mm)
- Flush Method: Washdown

Features

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. rear spud inlet
- 2" NPT outlet flange
- Fully concealed trapway
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested
- Permanent SloanTec® hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces

Plumbing System Requirements

- Maximum Static Pressure: 80 PSI (552 kPa)
- Maximum Flow Rate: 8.5 gpm (32.2 Lpm)

Warranty

[View Warranty Information](#)

Notes


All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

WaterSense compliant when used with a WaterSense compliant flushometer.

[Find a compatible flushometer](#) for this urinal.

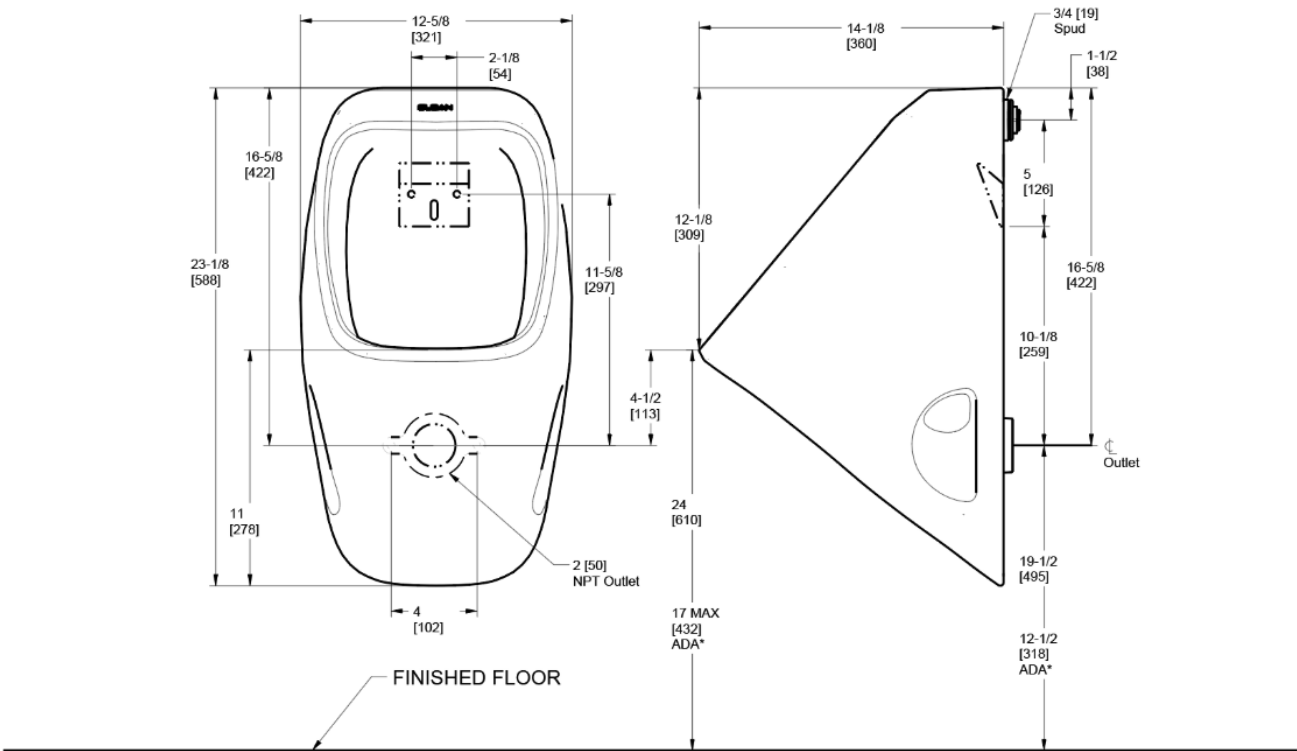

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16½" rim height or less to ensure compliance.