

OPTIONS


Flush Volume

- 0.125 gpf (0.5 Lpf) (0.125)
- 0.25 gpf (0.9 Lpf) (0.25)
- 0.5 gpf (1.9 Lpf) (0.5)

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

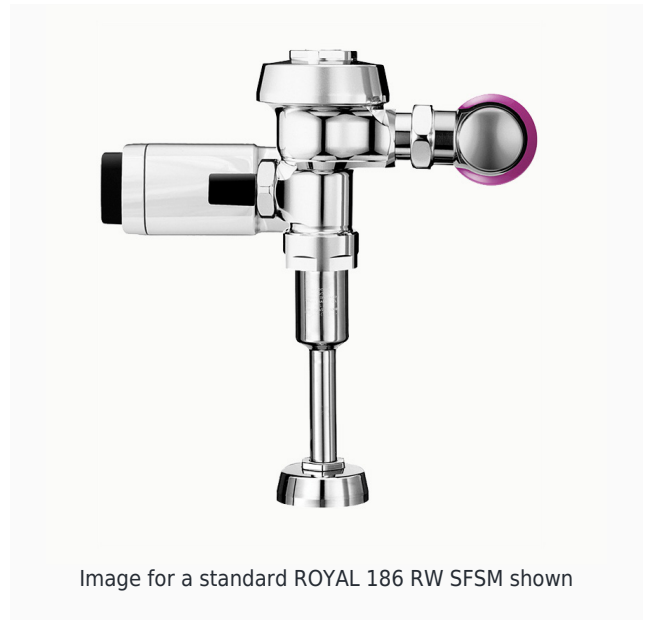

DESCRIPTION

Royal® Exposed Sensor Specialty Urinal Reclaimed Water Flushometer

FEATURES

- Includes the required wall plate and a purple wall flange to let users know reclaimed water is in use.
- All organic rubber has been replaced with synthetic compounds.
- Interior components are purple to let maintenance personnel know the flushometer is designed for reclaimed water.
- Critical components, including cover, valve body, control stop and sweat solder kit, are made of semi-red brass.
- Optional purple handle provides additional indication of reclaimed water use.
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Royal Reclaimed Water Flushometer Installation Instructions](#)
- [EBV-500/550-A Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Reclaimed Water Flushometers Repair and Maintenance Guide](#)
- [EBV500/EBV550 Repair and Maintenance Guide](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

- [Additional Downloads](#)