


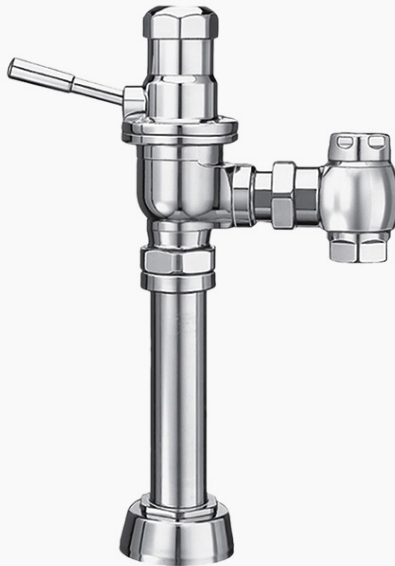

Dolphin Manual Flushometer

DOLPHIN 111-1.28-CP-WWT

Product description

1.28 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Whitworth Thread, Dolphin Exposed Manual Water Closet Flushometer.

Compliances & Certifications



(BAA Compliant, BREEAM Water Credit, cUPC Green Certified, Green Globes Water, IAPMO, LEED Water, Made in the USA, Satisfies LEED Credits, EPA WaterSense Listed)

Code 3050011

Finish

 Polished Chrome (CP)

Downloads

-  [Dolphin Standard Exposed Installation Instructions.pdf](#)
-  [Control Stop Repair and Maintenance Guide.pdf](#)
-  [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
-  [Additional Downloads](#)

Videos

-  [Sloan – Company Overview](#)

Details

- Flush Volume: 1.28 gpf (4.8 lpf)
- Finish: Polished Chrome (CP)
- Valve: Piston
- Valve Body Material: Red Brass
- Fixture Type: Water Closet
- Fixture Connection: Top Spud
- Rough-in Dimension: 11.5" (292mm)
- Spud Coupling: 1.5" (38mm)
- Supply Pipe: 1" (25mm)
- Special Features 1: Whitworth Thread (WWT)

Features

- Flush volume is factory set with option of adjusting volume range according to specific needs
- Flushing control mechanism functions in oil and is isolated from debris
- Water pressure not required to positively shut off
- Complies with military specifications
- Regulating screw for flush duration control
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

WaterSense compliant when used with a 1.28 gpf (4.8 lpf) WaterSense fixture.

Looking for other variations of the DOLPHIN 111 product? [View the general spec sheet with all options.](#)
[Find a compatible urinal](#) for this flushometer.
[Find a compatible water closet](#) for this flushometer.

