


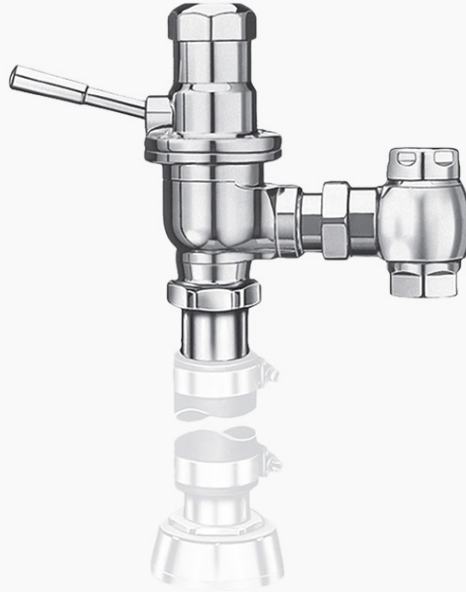

Dolphin Manual Flushometer

DOLPHIN TYPE I CLASS A-3.5-CP

Product description

3.5 gpf, Polished Chrome Finish, Dolphin Exposed Manual Water Closet Flushometer.

Compliances & Certifications



(BAA Compliant)

Code 3057004

Finish

 Polished Chrome (CP)

Downloads

- [Dolphin Standard Exposed Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Details

- Flush Volume: 3.5 gpf (13.2 lpf)
- Finish: Polished Chrome (CP)
- Valve: Piston
- Valve Body Material: Red Brass
- Fixture Type: Water Closet

Features

Exposed Water Closet Flushometer, for floor mounted or wall hung top spud bowls. Specifically engineered for salt water and severe water conditions. Meets U.S. Navy Bureau of Ships Specifications. Model Type I—Class A Shock Proof (factory set at 3.5 gpf/13.2 Lpf) Valve Adjustment Range: 0.5 gpf/1.9 Lpf to 16.0 gpf/60.6 Lpf Factory settings made at 40 psi (275 kPa) — flush volume will vary with pressure and flow rate

- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- Includes 1" Sil-braze Adapter

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

Looking for other variations of the DOLPHIN TYPE I CLASS A product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

