PWT™ Accessory

MCR-4011-A

Product description

PWT System 4-I/O Twisted Pair Communicating Controller.

Compliances & Certifications

(BAA Compliant)

Code 3375081

Downloads

- PWT MCR-4011 Communicating Controller Installation Instructions.pdf
- Programmed Water Technologies (PWT) Brochure.pdf
- Additional Downloads

Videos

- Sloan – Company Overview

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Features

- IP-53 rated enclosure w/ hinged door
- Four input/output controller used with PWT push buttons, electronic flushometers and solenoids to control water closets, lavatories and showers
- Can connect to a computer managed, FT-10 (twisted pair) network.
- Four Input/Output twisted pair communicating control
- Fixture usage can be pre-programmed for delays, scheduled runtimes or complete lockouts to prohibit improper usage of water closets, lavatories and showers
- May be connected to PWT management console for communicating solution
- Input and output diagnostic LEDs give immediate information about service issues
- Easy access reset button
- Different controllers offer oversight of various combinations of fixtures

Warranty

View Warranty Information

Notes

All information contained within this document subject to change without notice.

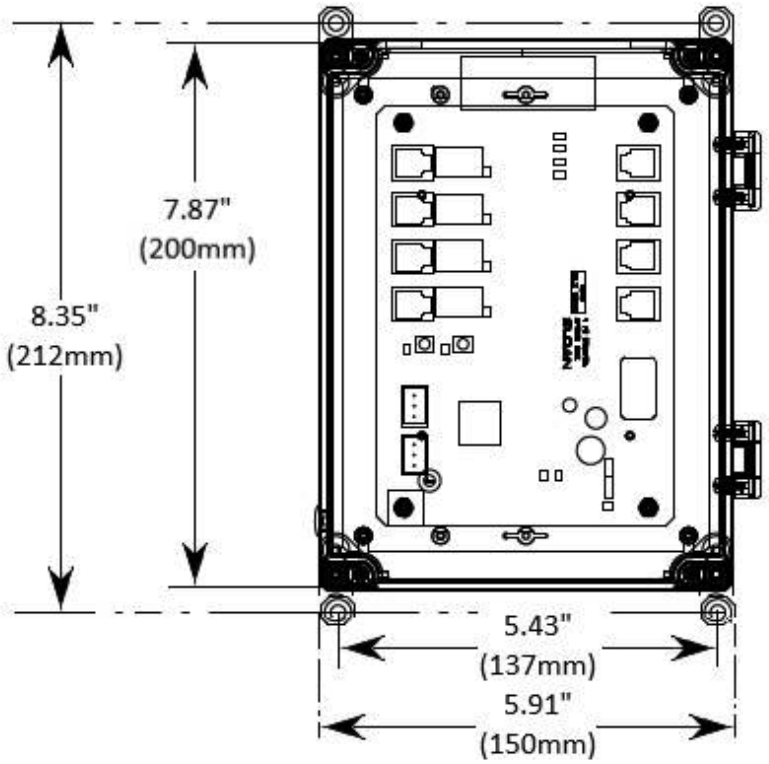
7.87"
(200mm)
8.35"
(212mm)
5.43"
(137mm)
5.91"
(150mm)