

OPTIONS**Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 1.28 gpf (4.8 Lpf) (1.28)

Water Efficiency

- Low Consumption
- High Efficiency

Control Stop

- Ground Joint (GJ)
- Less (L/STOP)
- Wheel Handle (K)

Vacuum Breaker

- Less (XYV)

Adapter

- Sweat Solder Adapter Kit

Bumper

- Angle Stop (YO)

Special Features

- Whitworth Thread (WWT)

Compliances & Certifications

- BAA Compliant
- BABAA Compliant
- Made in the USA
- UPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

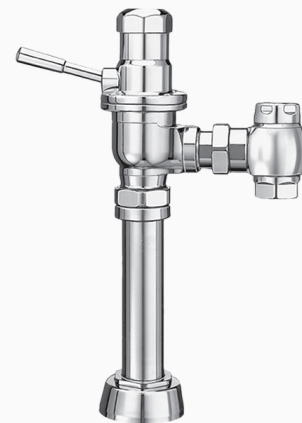


Image for a standard DOLPHIN 111 shown

DESCRIPTION

Dolphin Exposed Manual Water Closet Flushometer

FEATURES

- Flush volume is factory set with option of adjusting volume range according to specific needs
- Flushing control mechanism functions in oil and is isolated from debris
- Water pressure not required to positively shut off
- Complies with military specifications
- Regulating screw for flush duration control
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Dolphin Standard Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Dolphin Repair and Maintenance Guide](#)
- [Additional Downloads](#)