



Variation Not Shown: Metal Button Panel Mount Actuator

## Regal® Manual Specialty Flushometer

### REGAL 9603-3.5-XL-RB-MBPM

#### Product description

3.5 gpf, XL Sweat Solder Adapter Kit, Rough Brass Finish, Fixture Connection Rear Spud, Single Flush, Metal Button Panel Mount Push Button, Regal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

#### Compliances & Certifications



(BAA Compliant, BABAA Compliant, IAPMO, UPC Certified)

#### Code 3988118

#### Finish



Rough Brass (RB)

#### Downloads

- [Concealed Flushometer Installation Instructions for Stainless Steel Fixtures.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

#### Videos

- [Sloan – Company Overview](#)

## Details

- Flush Volume: 3.5 gpf (13.2 lpf)
- Finish: Rough Brass (RB)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Rear Spud
- Rough-in Dimension: 16" (406mm)
- Spud Coupling: 1.5" (38mm)
- Supply Pipe: 1" (25mm)
- Push Button: Metal Button Panel Mount (MBPM)
- Adapter: XL Sweat Solder Adapter Kit (XL)

## Features

- Royal®, Regal® and Sloan® Prison Flushometers feature all the performance benefits of standard concealed, diaphragm model Flushometers with added durability to withstand rough environments
- Flush volumes as low as 0.5 gpf/1.9 Lpf meet water-efficiency goals
- Choose from Flushometers intended for use with stainless-steel urinal fixtures from various manufacturers
- Choose from Flushometers intended for use with stainless-steel urinal fixtures from various manufacturers
- Diaphragm, handle packing, stop seat and vacuum breaker molded from PERMEX® rubber compound for chloramine resistance
- Vandal-proof, push button operation with ADA-compliant fixture wall or panel-mount actuator options on select models
- Non-hold-open feature keeps fixture from surpassing intended water consumption
- Adjustable tailpiece accommodates various installations
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

## Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

## Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

## Warranty

[View Warranty Information](#)


## Notes

All information contained within this document subject to change without notice.

Looking for other variations of the REGAL 9603 product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

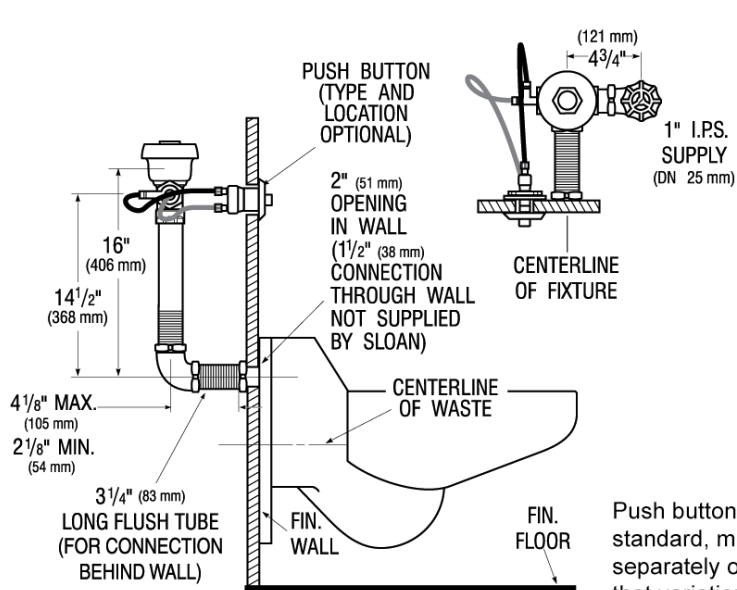

Push button is not standard, must order separately or with that variation

