



Sloan® Sensor Faucet

SF-2200-4-PLG-TEE-CP-0.35GPM-MLM-FCT

### **Product description**

4" Trim Plate, Plug Adapter Power Supply, Back-Check Tee, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Sloan® Hardwired-Powered Deck-Mounted Gooseneck Body Faucet.

### Compliances & Certifications



























(ADA Compliant, ASME A112.18.1 Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, Green Globes Water, IAPMO, LEED Water, NSF-61/ CAN-61, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, UL Certified, UPC Low Lead Certified, WELL Building Standard)

### Code 3362175

### **Finish**



Polished Chrome (CP)

### **Downloads**

- SF Series Installation Instructions.pdf
- SF Series (FR) Installation Instructions.pdf
- Trim Plate Guide.pdf
- SF-2100:2150 and SF-2200:2250 Repair & Maintenance Guide.pdf
- Faucet and Soap Dispenser Brochure.pdf
- Faucets Brochure (Spanish).pdf
- Additional Downloads

### **Videos**

- Sloan Company Overview
- SF-2100/2150/SF-2200/2250/SF-2300/2350/ SF-2400/2450 Parts Breakdown
- ► SF-2100/2150/SF-2200/2250/SF-2300/2350/ SF-2400/2450 Module Replacement

# **Product Information**

# SF-2200-4-PLG-TEE-CP-0.35GPM-MLM-FCT

#### **Details**

• Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)

· Spray Type: Multi-Laminar (MLM)

· Sensor Type: Infrared

· Mounting Type: Single Hole

• Trim Plate: 4" (102mm) (4)

· Power Supply: Plug Adapter (PLG)

• Temperature Mixer: Back-Check Tee (TEE)

Finish: Polished Chrome (CP)

· Factory Default Timeout: 30s

· Factory Default GPC: 0.175 gpc

#### **Features**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Gooseneck Hand Washing Faucet with the following features:

- · Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- · 24" (610 mm) Long Flex Hose
- · Filtered Solenoid Valve with serviceable Strainer Filter
- · Includes Four (4) AA-size Batteries
- · Includes appropriate Mounting Hardware
- 1 Year limited warranty
- · Chrome Plated Finish
- · 0.35GPM Flow Rate with multi-laminar flow
- Includes 4" Trim Plate for additional coverage of sink deck near spout
- · Includes Plug Adapter

### **Electrical specifications**

- · Battery Life: 2 years 8,000 cycles/month
- · Timeout Adjustment Setting: 30 Seconds

### Warranty

View Warranty Information

### **Notes**


All information contained within this document subject to change without notice.

Looking for other variations of the SF-2200 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet.

Find a compatible sink for this faucet



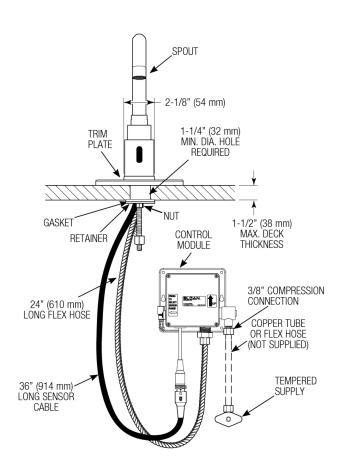

# HOT AND COLD WATER SUPPLY APPLICATIONS

(SPECIFY IN MODEL VARIATION)

