

OPTIONS**Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 1.6/1.1 gpf (6.0/4.2 Lpf) (1.6/1.1)

Water Efficiency

- High Efficiency
- Low Consumption

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- cUPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- cUPC Green Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

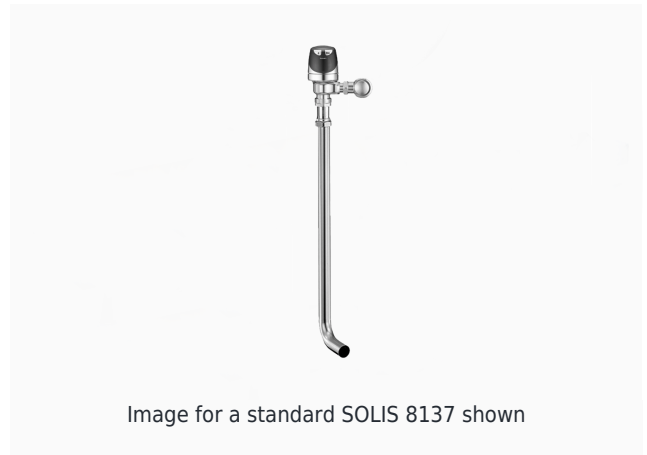


Image for a standard SOLIS 8137 shown

DESCRIPTION

SOLIS® Exposed Sensor Specialty Water Closet Squat Toilet Flushometer

FEATURES

- ADA-compliant, exposed, solar-powered, sensor-operated dual-flush or single-flush flushometer for back inlet squat toilets
- Sensor assembly is powered by a solar cell that will harvest power from artificial indoor light (incandescent, fluorescent or LED) and use it as the energy source
- Automatically operates by means of an infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- Automatically initiates a 1.1 gpf or 1.6 gpf flush based on how long user remains in sensor range
- User friendly three (3) second Flush Delay and Courtesy Flush™ Override Button
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Solis 8100 Series \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Concealed Solis Repair and Maintenance Guide](#)
- [Exposed Solis Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com