

**OPTIONS****Flush Volume**

1.6 gpf (6.0 Lpf) (1.6)

**Inlet**

Right of Valve (A)

**Compliances & Certifications**

BAA Compliant  
BABAA Compliant  
Made in the USA  
UPC Certified

**NOTES**

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

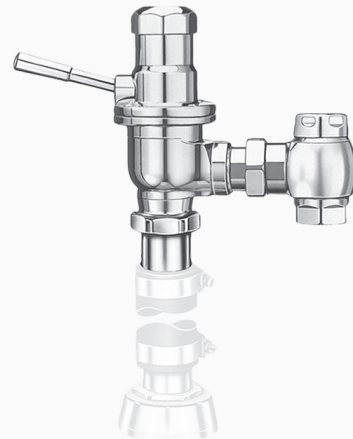


Image for a standard DOLPHIN TYPE I CLASS A shown

**DESCRIPTION**

Dolphin Exposed Manual Water Closet Flushometer

**FEATURES**

Exposed Water Closet Flushometer, for floor mounted or wall hung top spud bowls. Specifically engineered for salt water and severe water conditions. Meets U.S. Navy Bureau of Ships Specifications. Model Type I—Class A Shock Proof (factory set at 3.5 gpf/13.2 Lpf) Valve Adjustment Range: 0.5 gpf/1.9 Lpf to 16.0 gpf/60.6 Lpf Factory settings made at 40 psi (275 kPa) — flush volume will vary with pressure and flow rate

- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

**DOWNLOADS**

- [Dolphin Standard Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Dolphin Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)