



Urinal & Flushometer Combo

WEUS-7000.1411

Product description

Standard, SU-7009 Urinal and ECOS 186 HW Flushometer.

Compliances & Certifications



(ADA Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, Green Globes Water, HPD, IAPMO, LEED Water, Satisfies LEED Credits, EPA WaterSense Listed, WELL Building Standard)

Code 70001411

Downloads

- [Small Spud Urinal Installation Instructions.pdf](#)
- [ECOS Single Flush HW Flushometer and Retrofit.pdf](#)
- [SS:ST:SU:WETS:WEUS Fixtures Repair and Maintenance Guide.pdf](#)
- [ECOS HW Repair and Maintenance Guide.pdf](#)
- [Fixture Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 0.125–1.0 gpf (1.9–3.8 lpf)

Features

- Complete urinal system including ECOS HW flushometer Designed to maximize performance
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

Components



- Flushometer: Code 3370440
- Urinal: Code 1107009

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

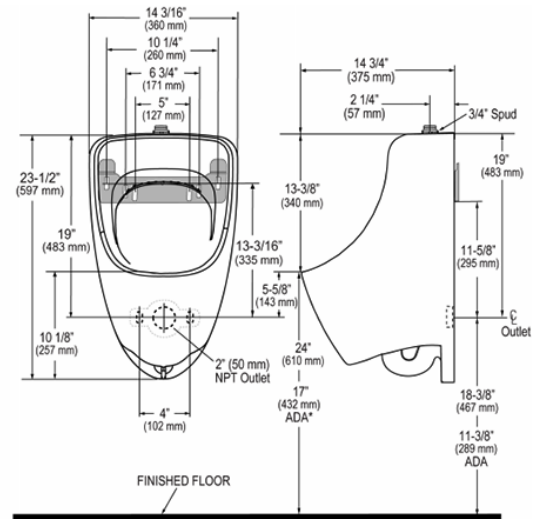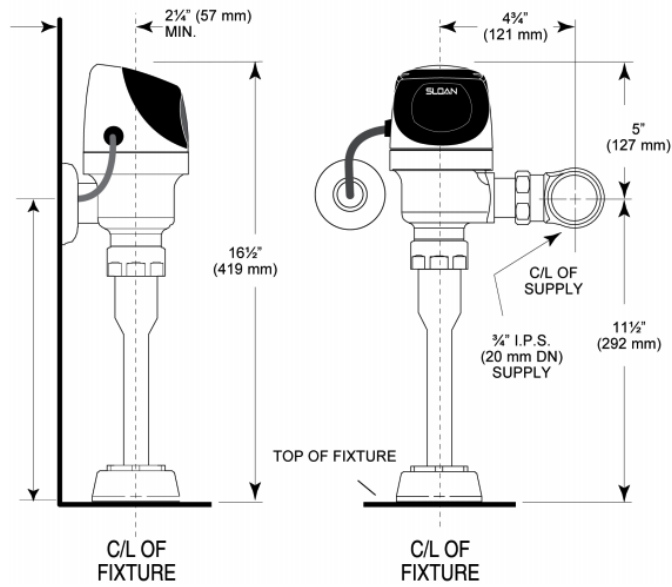

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16½" rim height or less to ensure compliance.