

OPTIONS**Flush Volume**

1.0 gpf (3.8 Lpf) (1.0)

1.5 gpf (5.7 Lpf) (1.5)

Control Stop

3/4"

Ground Joint (GJ)

Wheel Handle (K)

Vacuum Breaker

Less (XYV)

Adapter

Sweat Solder Adapter Kit

Compliances & Certifications

BAA Compliant

BABAA Compliant

Made in the USA

UPC Certified

NOTESFor product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

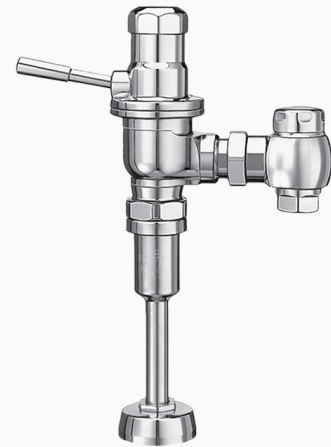


Image for a standard DOLPHIN 186 shown

DESCRIPTION

Dolphin Exposed Manual Urinal Flushometer

FEATURES

- Flush volume is factory set with option of adjusting volume range according to specific needs
- Flushing control mechanism functions in oil and is isolated from debris
- Water pressure not required to positively shut off
- Complies with military specifications
- Regulating screw for flush duration control
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Dolphin Standard Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Dolphin Repair and Maintenance Guide](#)
- [Additional Downloads](#)