

OPTIONS**Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 3.5 gpf (13.2 Lpf) (3.5)
- 2.4 gpf (9.1 Lpf) (2.4)

Water Efficiency

- Low Consumption
- Water Saver

Fixture Connection

- Top Spud
- Rear Spud

L Dimension

- 8 ¾" (222mm) (8-3/4-LDIM)
- 2 ¾" (70mm) (2-3/4-LDIM)
- 3 ¾" (95mm) (3-3/4-LDIM)
- 6 ¾" (171mm) (6-3/4-LDIM)
- 10 ¾" (273mm) (10-3/4-LDIM)
- 12 ¾" (324mm) (12-3/4-LDIM)
- 4 ¾" (121mm) (4-3/4-LDIM)
- 5 ¾" (146mm) (5-3/4-LDIM)
- 7 ¾" (197mm) (7-3/4-LDIM)
- 9 ¾" (248mm) (9-3/4-LDIM)

Wall Box

- Standard (not included, order separately)

Handle

- Metal Oscillating (J)

Push Button

- 3" Metal Oscillating (L3)

Control Stop

- 1" Straight (E)

Special Features

- Whitworth Thread (WWT)

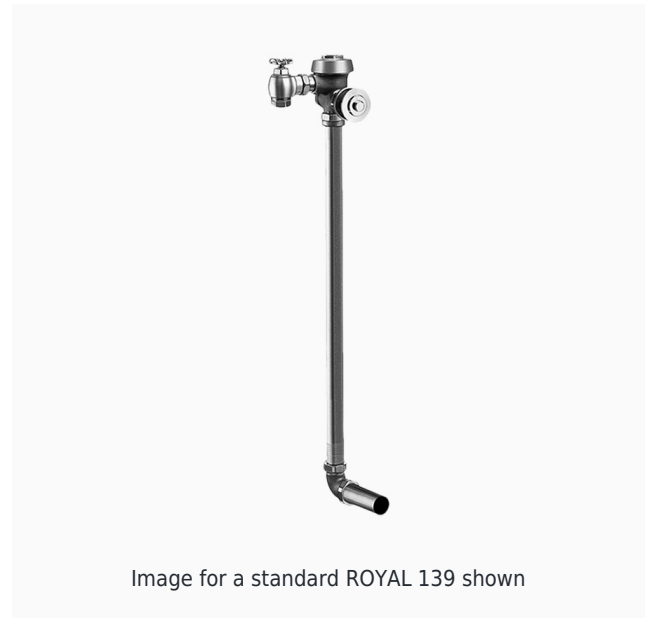
Compliances & Certifications

- BAA Compliant
- BABAA Compliant
- Made in the USA
- UPC Certified
- cUPC Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change

**DESCRIPTION**

Royal® Concealed Manual Water Closet Flushometer

FEATURES

- Flush volumes start as low as 1.6 gpf/6.0 Lpf
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Non-hold-open handle prevents external water adjustment and saves water
- Adjustable tailpiece
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Sloan Concealed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Additional Downloads](#)

without notice.