Stainless Steel Sink

ESS-3100

Product description

Stainless Steel 1-Station Deluxe Scrub Sink.

Compliances & Certifications

(ADA Compliant*, BAA Compliant, BABAA Compliant, CSA Certified, ICC A117.1, TAS)

Code ESS-3100

Downloads

- Optima ESS-2000_3000 Series Installation Instructions.pdf
- Optima ESS-2000_3000 Series (Spanish) Installation Instructions.pdf
- EHS-1000-ESS-2000-3000 Series Repair and Maintenance Guide.pdf
- Sinks - Full Line Brochure.pdf
- Additional Downloads

Videos

- Sloan – Company Overview

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Details

- Material:
  - Stainless Steel
- Enclosure Type: Stainless Solid
- Mounting: Wall-Mounted
- Width: 32” (813mm)

Features

Deluxe Single Station Stainless Steel Scrub Sink with Sensor Activated, 24 VAC, Chrome Plated Brass Hand Washing Faucet with the following features:

- Sink constructed from 14 gauge, Type 304 stainless steel with bead blast finish on sink bowl interior for superior wash-down characteristics
- Sloan OPTIMA Faucet for hands-free operation
- Knee activated soap dispenser for hands-free operation
- Sink is shipped pre-plumbed for easy installation
- 18 gauge “lift-out” style front access panel for easy maintenance access

Recommended specifications

Sloan Stainless Series Scrub Sink model no. ESS 3X00. Product to be made of 14 gauge type 304 stainless steel with Sloan sensor faucets. Sink design to be ADA compliant.

Suggested Faucets

Warranty

View Warranty Information

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Find a compatible faucet for this sink.
Find a matching soap dispenser for this sink.

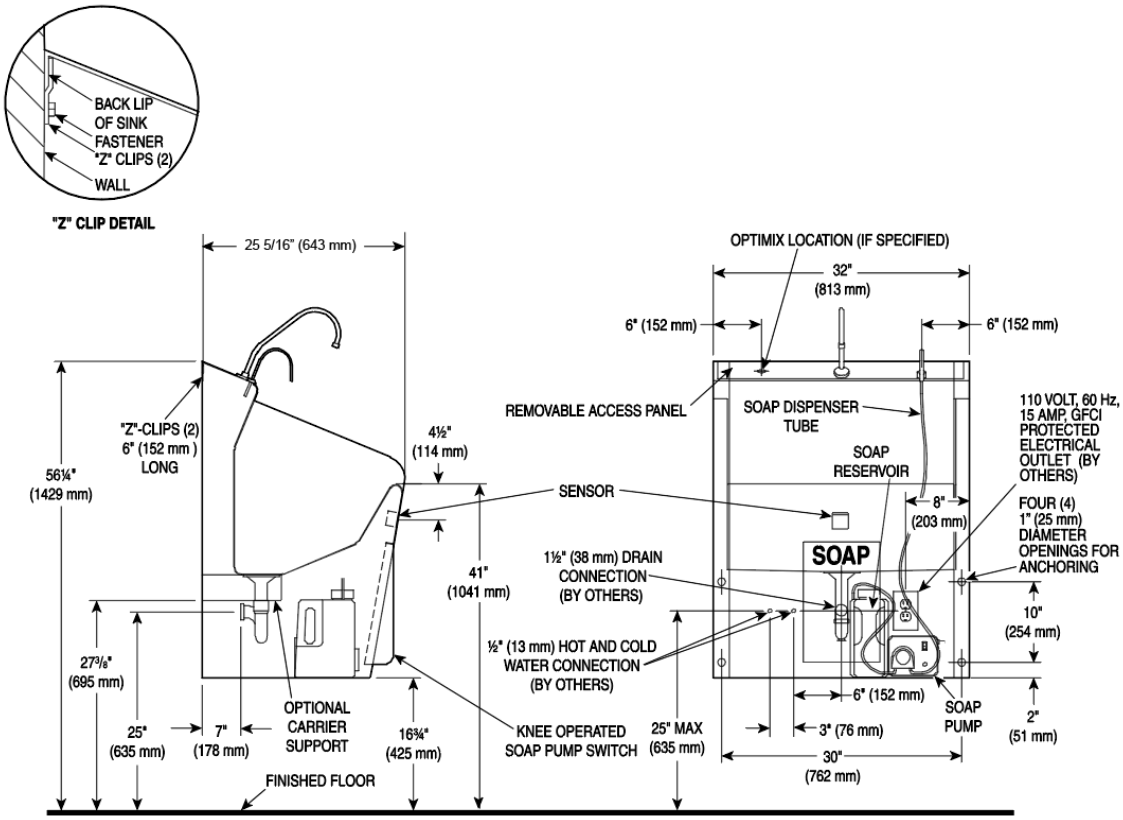
BACK LIP OF SINK
FASTENER
"Z" CLIPS (2)
WALL
"Z" CLIP DETAIL
25 5/16" (643 mm)
OPTIMIX LOCATION (IF SPECIFIED)
32" (813 mm)
6" (152 mm)
6" (152 mm)
REMOVABLE ACCESS PANEL
SOAP DISPENSER TUBE
110 VOLT, 60 Hz, 15 AMP, GFCI PROTECTED ELECTRICAL OUTLET (BY OTHERS)
"Z"-CLIPS (2) 6" (152 mm) LONG
4½" (114 mm)
56¼" (1429 mm)
SOAP RESERVOIR
SENSOR
8" (203 mm)
FOUR (4) 1" (25 mm) DIAMETER OPENINGS FOR ANCHORING
SOAP
41" (1041 mm)
1½" (38 mm) DRAIN CONNECTION (BY OTHERS)
10" (254 mm)
½" (13 mm) HOT AND COLD WATER CONNECTION (BY OTHERS)
27⅜" (695 mm)
6" (152 mm)
SOAP PUMP
2" (51 mm)
OPTIONAL CARRIER SUPPORT
25" (635 mm)
7" (178 mm)
16¾" (425 mm)
KNEE OPERATED SOAP PUMP SWITCH
25" MAX (635 mm)
3" (76 mm)
30" (762 mm)
FINISHED FLOOR