

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

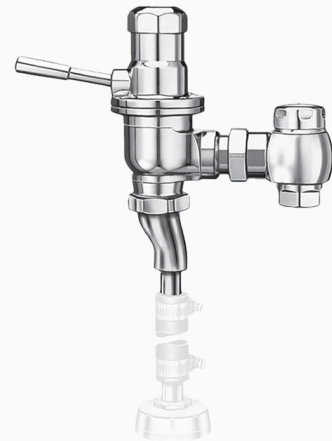


Image for a standard DOLPHIN TYPE II CLASS A shown

DESCRIPTION

Dolphin Exposed Manual Urinal Flushometer

FEATURES

- ¾" I.P.S. Screwdriver Bak-Chek™ Angle Stop with ½" Inlet Adapter
- Vandal Resistant Stop Cap
- Ground Joint Tailpiece
- ¾" Scored Outlet with ½" Offset (hose, clamps, and flush connection not furnished with valve)
- Flushometer does not require water pressure to positively shut off
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX™
- Rubber Compound for Chloramine Resistance
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy
- Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037

DOWNLOADS

- [Dolphin Standard Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Dolphin Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com