


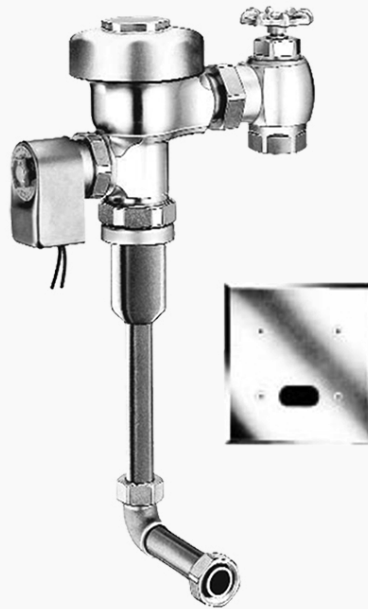

Regal® Sensor Flushometer

REGAL 195 ESS-1.0-XL-RB-L/OR-HW-24V

Product description

1.0 gpf, XL Sweat Solder Adapter Kit, Rough Brass Finish, Fixture Connection Rear Spud, Single Flush, 2"-10.75" L Dimension, Less Override, Hardwired, Sensor-Operated, 24V, Regal® Concealed Sensor Hardwired Urinal Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, IAPMO, UL Certified (US), cUPC Certified)

Code 3983224

Finish



Rough Brass (RB)

Downloads

- [Sloan_Regal Concealed and Exposed Sensor Installation Instructions.pdf](#)
- [Optima ESS Repair and Maintenance Guide.pdf](#)
- [Sloan:Regal ESS Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [ESS Flushometer](#)

Details

- Flush Volume: 1.0 gpf (3.8 lpf)
- Finish: Rough Brass (RB)
- Power Type: Hardwired (HW)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Urinal
- Fixture Connection: Rear Spud
- Rough-in Dimension: 13.5" (343mm)
- Spud Coupling: 0.75" (19mm)
- Supply Pipe: 0.75" (19mm)
- L Dimension: 2"-10.75" (51-273mm)
- Override: Less (L/OR)
- Voltage: 24V (24V)
- Adapter: XL Sweat Solder Adapter Kit (XL)

Features

- Vacuum Breaker Flush Connection
- OPTIMA® EL-1500 Self-Adaptive Infrared Sensor with Indicator Light
- Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- Spud Coupling for 3/4" Concealed Back Spud
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Electrical specifications

- Arming Delay: 8 seconds
- Control Circuit:
 - Solid State
 - 24 VAC Input
 - 24 VAC Output
- Flush Delay: 1 seconds
- Sensor Range: 15"-30" (381 - 762mm)
- Self-Adaptive Window: ±8"
- Solenoid Operator: 24 VAC
- Transformers (Specify Separately):
 - EL-154/0345154
 - EL-342/0345999

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the REGAL 195 ESS product?

[View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

