

OPTIONS

Flush Volume

- 1.0 gpf (3.8 Lpf) (1.0)
- 0.5 gpf (1.9 Lpf) (0.5)
- 1.5 gpf (5.7 Lpf) (1.5)
- 3.5 gpf (13.2 Lpf) (3.5)

Water Efficiency

- Low Consumption
- High Efficiency
- Water Saver

L Dimension

- 10 ¾" (273mm) (10-3/4-LDIM)

Push Button

- Metal Index (L)

Vacuum Breaker

- Less (XYV)


Compliances & Certifications

- BAA Compliant
- BABAA Compliant
- UPC Certified
- cUPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

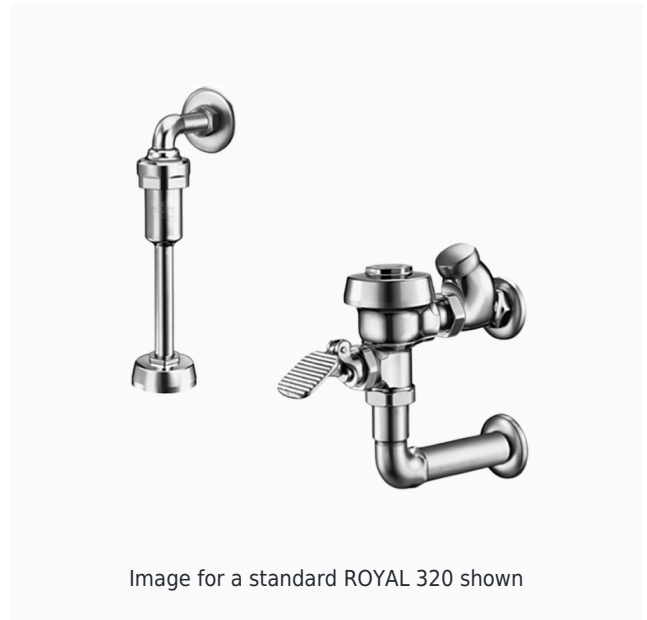

DESCRIPTION

Royal® Exposed Manual Specialty Urinal Foot Pedal Flushometer

FEATURES

- Water conservation is aided by the non-hold-open foot pedal (not ADA compliant)
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- No external volume adjustment to ensure water conservation
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Royal/Regal/Crown Naval Foot Pedal Flushometer Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Royal Manual Diaphragm Flushometer Repair and Maintenance Guide](#)
- [Additional Downloads](#)